



FEATURES:

- ✓ Architectural luminaire with direct-indirect distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire is made from curved aluminum profile.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Remote driver is mounted in round ceiling canopy or optional rectangle enclosure.
- ✓ LED tape is rated for 50,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards. **reinventlight**

SPECIFICATION:

ED ORBIT+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

SIZE

- ☐ 2 Ft
- ☐ 3 Ft
- ☐ 4 Ft
- ☐ *

* Please specify required size.

SOURCE

- ☐ 25 W
- ☐ 50 W
- ☐ 75 W*

*Available for 4 Ft.
**Other Wattages are available.

RADIANCE

- ☐ IL - Inner Lit (100% Inward)
- ☐ OL - Outer Lit (100% Outward)

*Light Distribution.

VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DL2 - 0-10V Dim (TW)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐ *

*Specify dimming protocol.

MOUNTING

- ☐ C4-Canopy 4 Ft*
- ☐ C6-Canopy 6 Ft*
- ☐ C Ft**
- ☐ D4-Drop 4 Ft
- ☐ D6-Drop 6 Ft
- ☐ D Ft**
- ☐ S4-Suspension 4 Ft
- ☐ S6-Suspension 6 Ft
- ☐ S Ft**
- ☐ SF - Surface Mount

*Canopy installation is not available for custom sizes.

**Please specify required length.

***Remote Driver only.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black*
- ☐ WH - White**
- ☐ CF/RAL ***

*RAL 9005

**RAL 9003

***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW
- ☐ TW - Tunable White*
(2700K-6500K)

- ☐ **

*Available with 0-10V, Dali or Bluetooth controls.

**Specify required CCT.

OPTIONS

- ☐ No Options*
- ☐ CB - Casambi/Bluetooth
- ☐ **

*Leave empty.

**Specify required option.

LUMEN OUTPUT:


Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm
75 W	6610 lm	6750 lm	6890 lm



Project:



Type:

SIZE:

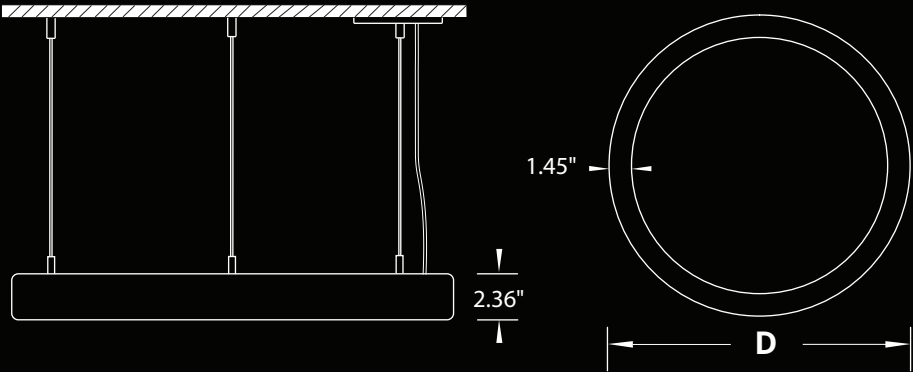

Diameter		
Size	Outer Lit	Inner Lit
2 Ft	27.952 In	25.196 In
3 Ft	34.250 In	37.795 In
4 Ft	46.456 In	44.094 In

RADIANCE:

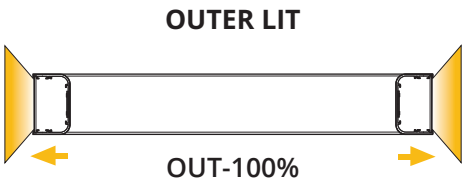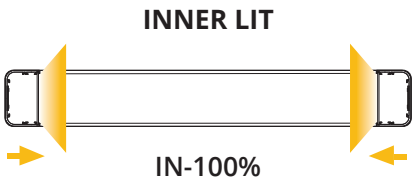

MOUNTING:



SUSPENDED - CEILING CANOPY




SUSPENDED - STRAIGHT WIRE*

*Remote Driver.



DROP SUSPENSION*

*Remote Driver.

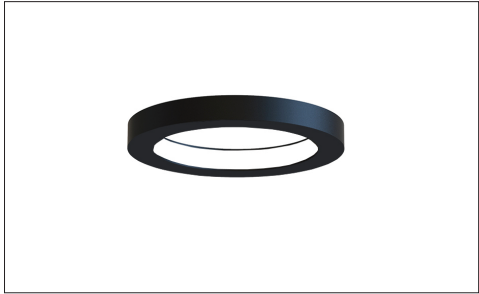

SURFACE MOUNT*

*Remote Driver.