

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: LED Module.
- ✓ Unique multioptic lens provide superior lighting distribution with Unified Glare Rating of <19URG.
- ✓ Ideal for computerized offices and educational institutional.
- ✓ Suitable for suspended installation with remote driver.
- ✓ Low profile steel body is available in white, black or grey finish.
- ✓ LED's are rated for 60,000hrs. L70 with +90 CRI.
- ✓ Standard suspension length is 96 Inch.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED RAYS+ SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

SOURCE

- 25W LED
- 35W LED

RADIANCE

- DD - Direct (100%Down) *Light Distribution.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth
- *

*Please specify dimming method.

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*

*Please specify required Length.

LENS

- OP - Opal

FINISH

- WH - White
- BK - Black
- GR - Grey

CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin

*Other options are available.

OPTIONS

- DOS - Daylight & Occupancy Sensor*


*With compatible DALI driver.

DIMENSIONS:

Length	Width	Depth
47.25"	3.5"	0.5"

LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2800 lm	2875 lm	2950 lm
35W	3925 lm	4025 lm	4125 lm

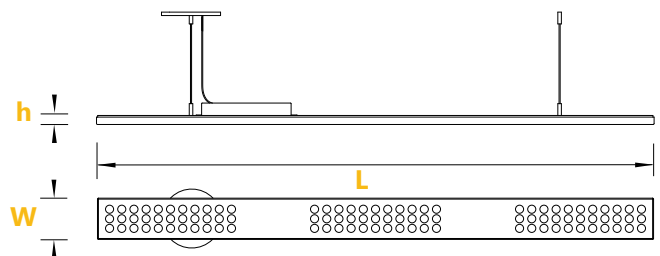

Project:

Type: