


FEATURES:

- ✓ Architectural luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted lens.
- ✓ Sleek body of the luminaire is built from aluminum.
- ✓ Suitable for surface-mounted and suspended installations.
- ✓ Comes with a standard black or white finish.
- ✓ Also available in custom color option.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight
SPECIFICATION:

ED DISC+ SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT

Enter the Product Code into the boxes above.

SOURCE

- 30 W
- 40 W

RADIANCE

- DD - Direct
 - UN - Uneven¹
1. 70% Down/30% Up

VOLTAGE

- UNV - 120/277V
 - 347V¹
1. Verify availability.

DRIVER

- ST - On/Off
 - DL - 0-10V Dim (1%)
 - DLO - 0-10V Dim (to Off)
 - DA4 - DALI D4i
 -
- Specify dimming protocol.

MOUNTING

- C6B - 6 ft Canopy BK¹
- C6W - 6 ft Canopy WH¹
- C ft²
- S6B - 6 ft Cord BK¹
- S6W - 6 ft Cord WH¹
- S ft²
- SF - Surface Mount

1. Canopy match the Cord color.
2. Specify Suspension length.

LENS

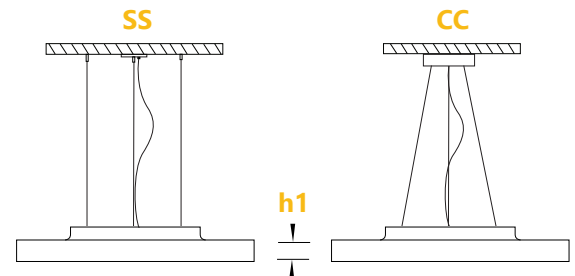

- OP - Opal

FINISH

- BK - Black¹
 - WH - White²
 - CF/RAL
1. RAL 9005
2. RAL 9003
Specify required RAL number

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI


DIMENSIONS:

Diameter	17.13 in
Height	3.58 in
Height 1	2.20 in

LUMEN OUTPUT:

Watts	30K	35K	40K
30 W	2800 lm	2850 lm	2900 lm
40 W	3725 lm	3800 lm	3875 lm


Project:
Type: