



FEATURES:

- ✓ Architectural luminaire with direct-indirect lighting distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire is made from curved aluminum profile.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Remote driver is mounted in round ceiling canopy or optional rectangle enclosure.
- ✓ LED tape is rated for 50,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

SPECIFICATION:

ED ORBIT+ - - - - - - - - - -

Enter the Product Code into the boxes above.

SIZE

- 2 Feet
- 3 Feet
- 4 Feet
- *

* Please specify required size.

SOURCE

- 25WLED
- 50WLED
- 75WLED*

*Available for 4 Feet.
**Other Wattages are available.

RADIANCE

- IL - Inner Lit (100% Inward)
- OL - Outer Lit (100%Outward)

*Light Distribution.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- WZ - Wiz**
- *

* Please specify dimming method (ELV).
**Remote driver only.

MOUNTING

- C4-Canopy 4Feet
- C6-Canopy 6Feet
- C Feet*
- D4-Drop 4Feet
- D6-Drop 6Feet
- D Feet*
- S4-Suspension 4Feet**
- S6-Suspension 6Feet**
- S Feet*
- SF - Surface Mount**

*Please specify required Length.
**Remote Driver.

LENS

- OP - Opal

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#

CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- RGBW

*Other options are available.

LUMEN OUTPUT:



Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6610 lm	6750 lm	6890 lm



Project:


Type:

SIZE:

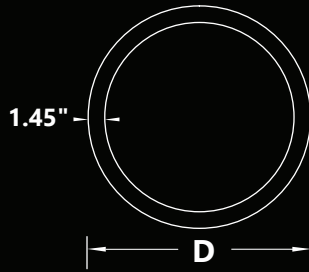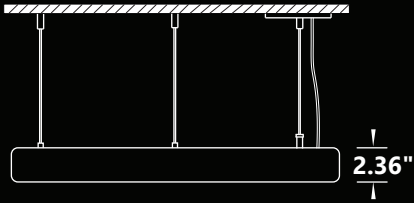

Diameter		
Size	Outer Lit	Inner Lit
2 Feet	27.952 Inch	25.196 Inch
3 Feet	34.250 Inch	37.795 Inch
4 Feet	46.456 Inch	44.094 Inch

RADIANCE:

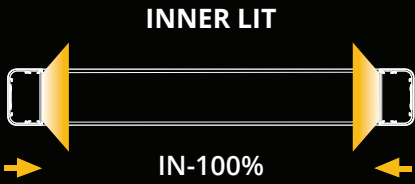

MOUNTING:



SUSPENDED - CEILING CANOPY



SUSPENDED - STRAIGHT WIRE*

*Remote Driver.



DROP SUSPENSION*

*Remote Driver.



SURFACE MOUNT*

*Remote Driver.