

## FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for surface mounted installations.
- ✓ LED Spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

## SPECIFICATION:

ED CUBIX+  TYPE x  SOURCE -  RADIANCE -  VOLTAGE -  DRIVER -  MOUNTING -  LOUVER -  FINISH -  CCT

Enter the Product Code into the boxes above.

### TYPE

- 1-Single
- 2-Double
- 3-Triple

### SOURCE

- 5W LED
- 10W LED
- 15W LED

### RADIANCE

- DD - Direct (100%Down)
- \*Light Distribution.

### VOLTAGE

- 120V
  - 277V
  - 347V\*
- \* Not available for all configurations.

### DRIVER

- ST - Standard (Non-Dimming)
  - DL - 0-10V Dimming (1%)
  - DA - DALI
  - BT - Bluetooth
  - \*
- \*Please specify dimming method.

### MOUNTING

- SF - Surface Mount

### LOUVER

- WH - White
- BK - Black
- SL - Silver
- GL - Gold
- RG - Rose Gold

### FINISH

- WH - White
- BK - Black
- GR - Grey

### CCT


- 30K/90CRI - 3000Kelvin
  - 35K/90CRI - 3500Kelvin
  - 40K/90CRI - 4000Kelvin
- \*Other options are available.

## DIMENSIONS:

Unit	Length	Height	Width
Single	3.750"	4.500"	3.750"
Double	7.375"	4.500"	3.750"
Triple	10.937"	4.500"	3.750"

## LUMEN OUTPUT:

Watts	30K	35K	40K
10W	930 lm	950 lm	970 lm
15W	1395 lm	1425 lm	1450 lm

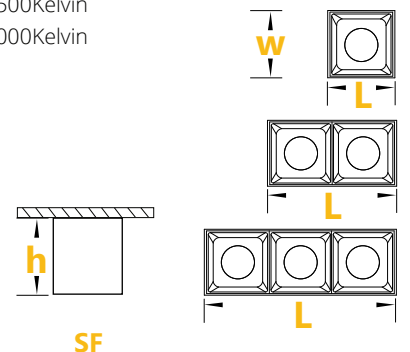

Project:

Type: