



Sonic VECTOR+



FEATURES:

- Architectural acoustic luminaire with direct indirect lighting distribution.
- Made from recyclable plastic material available in different thicknesses.
- Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- Light source: LED Boards.
- Diffused illumination is provided by frosted opal lens.
- Extruded aluminum body comes with built-in-driver and available in black or white finish.
- LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- Has a proven record in office, commercial and retail installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL Standards.

reinventlight

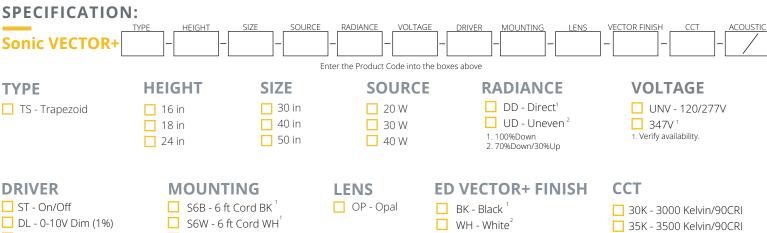

- ☐ DL 0-10V Dim (1%)
- ☐ DLO 0-10V Dim (to Off)
- ☐ DLA 0-10V Dim (Aux)
- DA4 DALI D4i
- Specify dimming protocol.
- □ S ___ ft²
- 1. Canopy match the Cord Color 2. Specify Suspension Length/color.

1. RAL 9005 2. RAL 9016

- 40K 4000 Kelvin/90CRI
 - RGBW¹
- TW Tunable White (27K-65K)
- 1. Available with DMX or CB. 2. Available with DL2, DA4 or CB. Specify required CCT.

ACOUSTIC FINISH

Please specify additional colour for Two-Tone



















05



































LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
20 W	2080 lm	2120 lm	2160 lm
30 W	3115 lm	3180 lm	3245 lm
40 W	4115 lm	4240 lm	4325 lm











Project: Type:



905-830-0339 / 1-800-667-9281



info@edisonlighting.ca




www.edisonlighting.ca









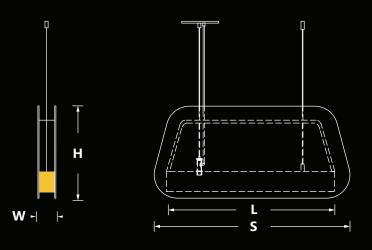

W - Width	H - Height	
	16 in = 15.75 in	
2.75 in	18 in = 17.75 in	
	24 in = 23.75 in	
S-Size	L - Luminare Length	
30 in	22.80 in	
40 in	33.80 in	
50 in	44.80 in	

RADIANCE:





FINISHES:


Regular








Two-Tone







905-830-0339 / 1-800-667-9281



info@edisonlighting.ca



www.edisonlighting.ca