


FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by regressed opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed, recessed T-Bar installations.
- ✓ Extruded aluminum body comes in white, black or grey finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



Enter the Product Code into the boxes above.

| | | | | | |
|--|--|---|---|--|--|
| <p>SIZE</p> <p>_____ Feet</p> | <p>SOURCE</p> <p><input type="checkbox"/> 5W/Ft LED</p> <p><input type="checkbox"/> 7W/Ft LED</p> <p><input type="checkbox"/> 10W/Ft LED</p> | <p>RADIANCE</p> <p><input type="checkbox"/> DD - Direct (100%Down)</p> <p><small>*Light Distribution.</small></p> | <p>VOLTAGE</p> <p><input type="checkbox"/> 120V</p> <p><input type="checkbox"/> 277V</p> <p><input type="checkbox"/> 347V*</p> <p><small>*Not available for all configurations.</small></p> | <p>DRIVER</p> <p><input type="checkbox"/> ST - Standard (Non-Dimming)</p> <p><input type="checkbox"/> DL - 0-10V Dimming (1%)</p> <p><input type="checkbox"/> DA - DALI</p> <p><input type="checkbox"/> BT - Bluetooth</p> <p><input type="checkbox"/> <input type="text"/>*</p> <p><input type="checkbox"/> EC - Emergency Circuit</p> <p><input type="checkbox"/> EM - Emergency**</p> <p><small>* Please specify dimming method.</small></p> <p><small>**Battery Pack per 4Feet section.</small></p> | <p>MOUNTING</p> <p><input type="checkbox"/> RS - Recessed</p> <p><input type="checkbox"/> RB - Recessed T-Bar</p> |
| <p>LENS</p> <p><input type="checkbox"/> OR - Opal Regressed</p> | <p>FINISH</p> <p><input type="checkbox"/> WH - White</p> <p><input type="checkbox"/> BK - Black</p> <p><input type="checkbox"/> GR - Grey</p> <p><input type="checkbox"/> CF - Custom <input type="text" value="RAL#"/></p> | <p>CCT</p> <p><input type="checkbox"/> 30K/90CRI - 3000Kelvin</p> <p><input type="checkbox"/> 35K/90CRI - 3500Kelvin</p> <p><input type="checkbox"/> 40K/90CRI - 4000Kelvin</p> <p><input type="checkbox"/> RGBW</p> <p><input type="checkbox"/> TW - Tunable White** (2700K-6500K)</p> <p><small>*Other options are available.</small></p> <p><small>**Available with 0-10V,Dali or Bluetooth controls.</small></p> | <p>OPTIONS</p> <p><input type="checkbox"/> No Options*</p> <p><input type="checkbox"/> DR - Damp Rated</p> <p><input type="checkbox"/> DOS - Daylight & Occupancy Sensor</p> <p><small>*Leave Empty.</small></p> <p><small>**Combination example (DR/DOS).</small></p> | | |

LUMEN OUTPUT W/Ft:


| Watts | 30K | 35K | 40K |
|-------|---------|---------|---------|
| 5W | 515 lm | 525 lm | 535 lm |
| 7W | 720 lm | 735 lm | 750 lm |
| 10W | 1030 lm | 1050 lm | 1080 lm |



Project:

Type:

SIZE:

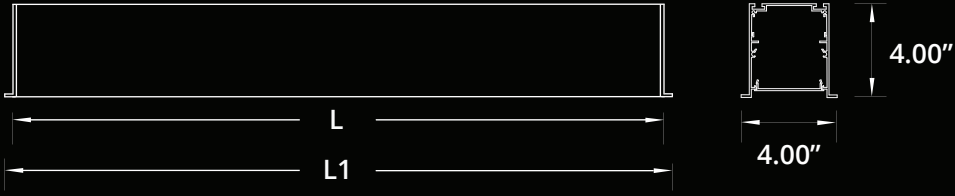


| Size | L(CUTOUT) | L1(T-BAR) |
|--------|-------------|------------|
| 1 Foot | 11.825 Inch | 11.75 Inch |
| 2 Feet | 24.575 Inch | 23.75 Inch |
| 3 Feet | 35.572 Inch | 35.75 Inch |
| 4 Feet | 48.322 Inch | 47.75 Inch |
| 5 Feet | 59.325 Inch | 59.75 Inch |
| 6 Feet | 72.075 Inch | 71.75 Inch |
| 7 Feet | 83.075 Inch | 83.75 Inch |
| 8 Feet | 95.822 Inch | 95.75 Inch |

RADIANCE:


DIRECT DISTRIBUTION




MOUNTING:

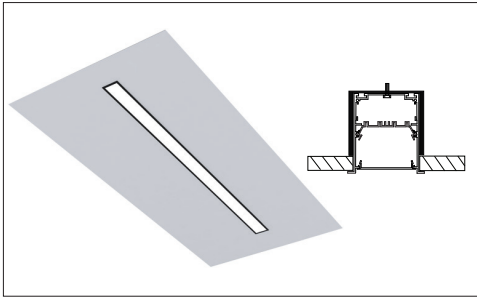


RECESSED

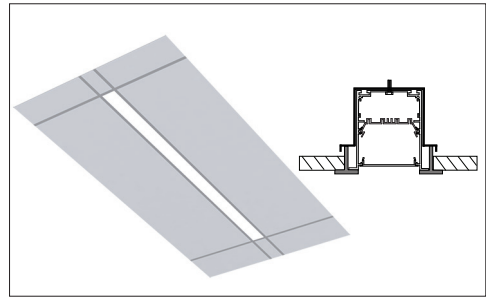

RECESSED T-BAR

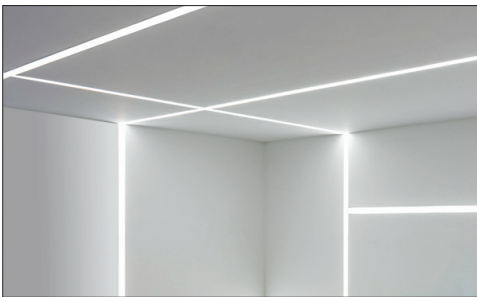

90° IN (WALL TO CEILING)

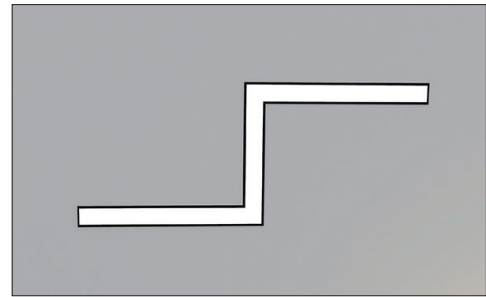

90° LEFT/90° RIGHT