


FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector is available with with 15° Spot, 25° Narrow Flood or 40° Flood Beam angle.
- ✓ Available with optional flat frame plate for NC installation.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Round adjustable trim can rotate 350° or tilted up to 30°.
- ✓ LED spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



SOURCE

- 8W LED
- 12W LED

RADIANCE

- DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

- 120V
 - 277V
 - 347V*
- *External step down transformer per luminaire.

DRIVER

- ST - Standard (Non-Dimming)
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - *
- * Please specify dimming method.

MOUNTING


- RT -Retrofit
- NC- New Const. Plate

REFLECTOR

- SP - Spot
- NF - Narrow Flood
- FL - Flood

LOUVER

- WH - White
- BK - Black
- SL - Silver
- CH - Chrome
- CD - Chrome Dark
- CG - Chrome Gold

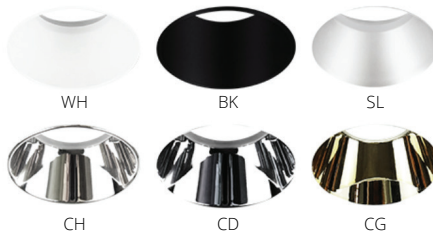


TRIM

- WH - White
- BK - Black

CCT

- 30K/90CRI - 3000Kelvin
 - 35K/90CRI - 3500Kelvin
 - 40K/90CRI - 4000Kelvin
- *Other options are available.

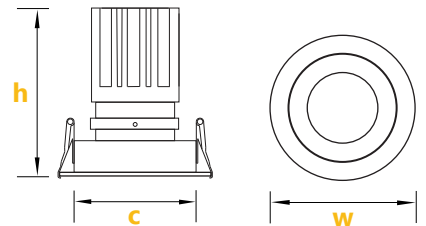

DIMENSIONS:

Height	Width	Cut Out
3.625"	3.36"	2.937"

LUMEN OUTPUT:


Watts	30K	35K	40K
8W	700 lm	720 lm	740 lm
12W	1050 lm	1080 lm	1110 lm



Project:

Type:

DRIVER BOX:

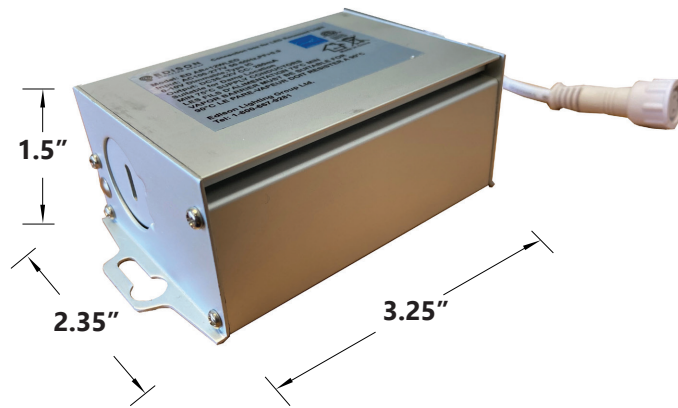

NC PLATE:

