EDISON LIGHTING GROUP

ED ORBIT+ S

FEATURES:

- Architectural luminaire with direct distribution.
- Light source: LED Tape.
- Diffused illumination is provided by high-efficiency frosted opal lens.
- Sleek body of luminaire is made from curved aluminum profile.
- Extruded aluminum body comes with a black or white finish.
- Remote driver enclosure can be surface-mounted or installed in a ceiling cavity. Standard enclosure size: 1.60”H x 3.75”W x 18.5”L.
- LED tape is rated for 60,000 hrs. L80 with 90 CRI.
- Proven performance in office, commercial and retail installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED ORBIT+ S — TYPE — SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

TYPE
- ☐ S - Shape

SIZE
- ☐ 3 ft
- ☐ 4 ft
- ☐ 6 ft
- ☐ 8 ft

SOURCE
- ☐ 5 W/ft
- ☐ 7 W/ft
- ☐ 10 W/ft

RADIANCE
- ☐ DD - Direct [1]
- ☐ SD - Side Distribution [2]

1. 100% Downward
2. 100% Sideways

VOLTAGE
- ☐ UNV - 120/277V
- ☐ 347V [1]

1. Verify availability.

DRIVER
- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DL2 - 0-10V Dim (TW)
- ☐ DLA - 0-10V Dim (Aux)
- ☐ DA4 - DALI D4i (TW)
- ☐ CV - Constant Voltage (RGBW)
- ☐ ____

Specify dimming protocol.

MOUNTING
- ☐ S6B - 6 ft Cord BK [1]
- ☐ S6W - 6 ft Cord WH [1]
- ☐ S ____ ft [2]

1. Canopy will match the Cord color.
2. Specify Suspension length and color.

LENS
- ☐ OP - Opal

FINISH
- ☐ BK - Black [1]
- ☐ WH - White [2]
- ☐ CF/RAL ____

1. RAL 9005
2. RAL 9003

Specify required RAL number.

CCT
- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW [1]
- ☐ TW - Tunable White (27K-65K) [2]
- ☐ ____

1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.

Specify required CCT.

OPTIONS
- ☐ No Options [1]
- ☐ EC - Emergency Circuit
- ☐ CB - Casambi Bluetooth(TW, RGBW)
- ☐ DMX - DMX (RGBW)
- ☐ AWN - Athena Wireless Node (DLA)

1. Leave empty.

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	440 lm	450 lm	460 lm
7 W	618 lm	630 lm	642 lm
10 W	882 lm	900 lm	918 lm

Project:

Type:

905-830-0339 / 1-800-667-9281 | info@edisonlighting.ca | www.edisonlighting.ca

Specifications are subject to change without notice. Every effort has been made for accuracy and errors are unintentional.

EDISON LIGHTING GROUP

ED ORBIT+ S

PROFILE:



3 ft and 4 ft

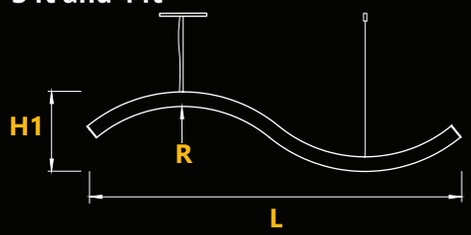

DIMENSIONS:

Profile	Size	Length	Height - H1	Radius - R
Width - W	3 ft	37.03 in	7.87 in	15 in
2.36 in	4 ft	46.75 in	6.00 in	30 in
Height - H	6 ft	73.00 in	7.87 in	15 in
1.45 in	8 ft	92.75 in	6.00 in	30 in

6 ft and 8 ft

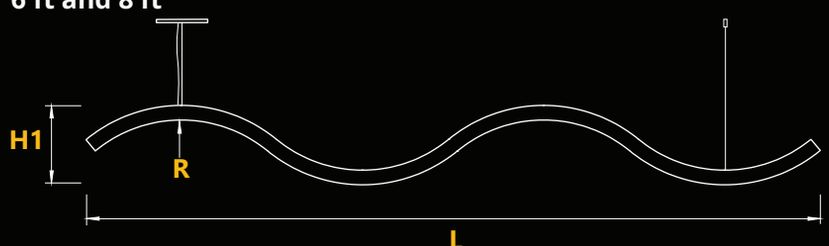

SIZES AND CONFIGURATIONS:



3 ft

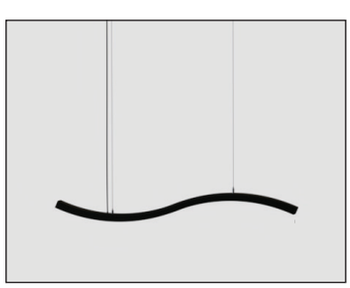

4 ft



6 ft



8 ft

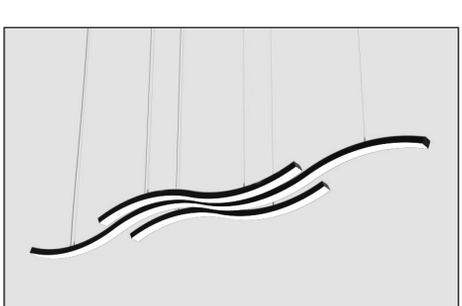

4 ft and 8 ft - Combination

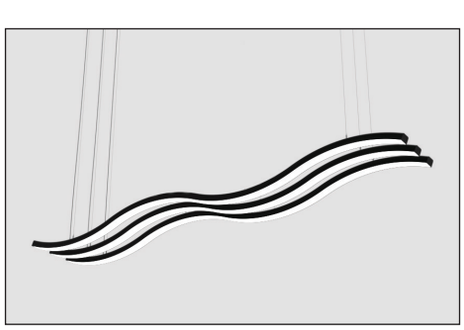

8 ft - Combination

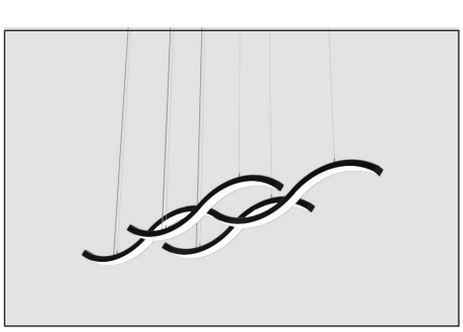

3 ft and 6 ft - Combination

905-830-0339 / 1-800-667-9281 | info@edisonlighting.ca | www.edisonlighting.ca

Specifications are subject to change without notice. Every effort has been made for accuracy and errors are unintentional.