



FEATURES:

- ✓ Architectural luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines aluminum body with high efficiency opal lens.
- ✓ Suitable for surface, suspended installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED DRUM+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

SIZE

- ☐ 2 ft
☐ 3 ft
☐ 4 ft
☐
 Specify custom size.

SOURCE

- ☐ 25 W
☐ 50 W
☐ 75 W¹
 1. Available for 4ft & Custom sizes.
 2. Other Wattages are available.

RADIANCE

- ☐ DD - Direct
☐ UD - Uneven

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐
 Specify dimming protocol.

MOUNTING

- ☐ C6B - 6 ft Canopy BK¹
☐ C6W - 6 ft Canopy WH¹
☐ C ft¹
☐ S6B - 6 ft Cord BK¹
☐ S6W - 6 ft Cord WH¹
☐ S ft²
☐ R6B - Stem 6 ft BK¹
☐ R6W - Stem 6 ft WH¹
☐ R ft²
☐ SF - Surface Mount
 1. Canopy will match the Cord color.
 2. Specify Suspension length and color.
 3. Stem Mounting, available only for 2ft size.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
 1. RAL 9005
 2. RAL 9016
 Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐
 1. Available with DMX or CB.
 2. Available with DL2, DA4 or CB.
 Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ DC - Dual Circuit²
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth(TW, RGBW)
☐ DMX - DMX (RGBW)
☐ AWN - Athena Wireless Node (DLA)
 1. Leave empty.
 2. Control Downlight/Uplight separately.

LUMEN OUTPUT:



Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm
75 W	7720 lm	7875 lm	8030 lm





Project:

Type:

SIZE:

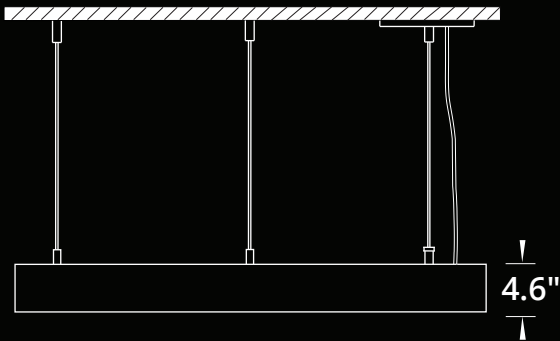


RADIANCE:




Size	Diameter
2 ft	23.60 in
3 ft	35.40 in
4 ft	47.20 in


MOUNTING:

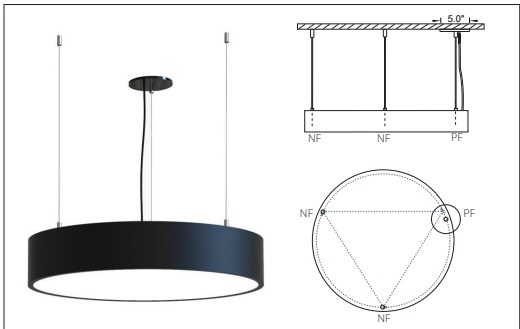


SUSPENDED - STRAIGHT WIRE
PF - Power Feed
NF - Non Power Feed

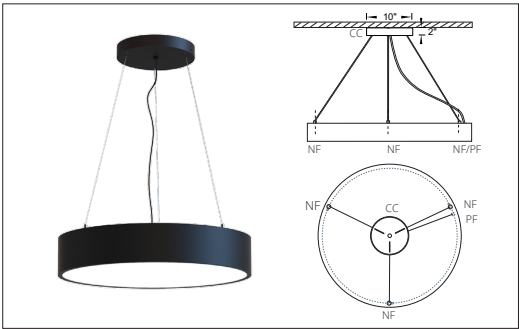

SUSPENDED - CEILING CANOPY
CC - Ceiling Canopy - Available for 2-3-4 ft sizes
PF - Power Feed
NF - Non Power Feed

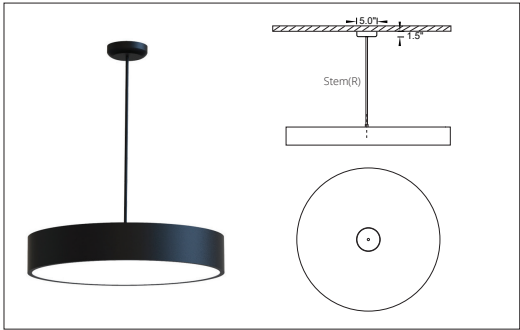

SUSPENDED - STEM
Available only for 2ft size.
3/8" IPS Stem with Power Feed

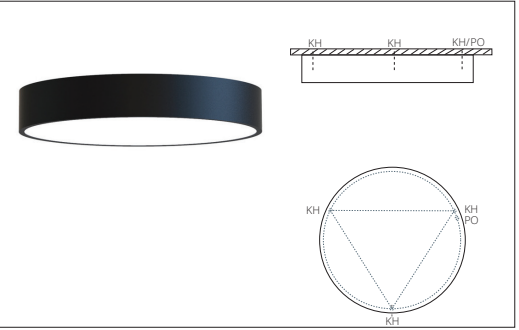

SURFACE MOUNT - (SF)