


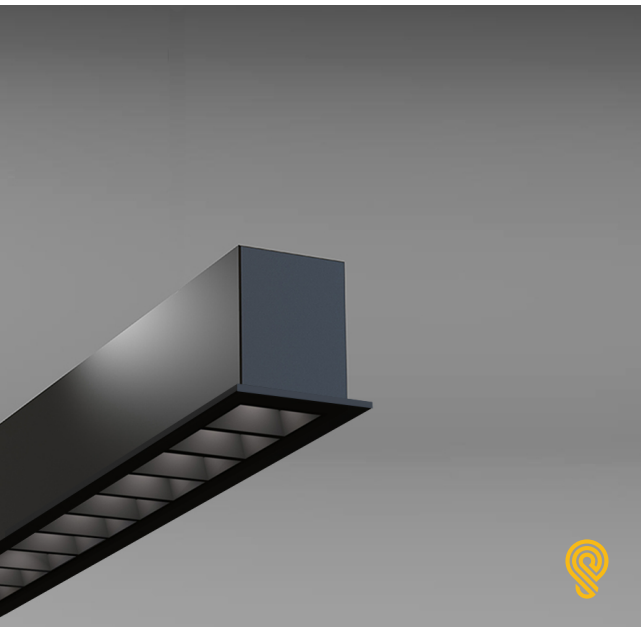

FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed installation into drywall or T-Bar.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ DO - Dark Optic

SIZE

_____ Ft*
 * 1 Ft increments only.

SOURCE

- ☐ 3 W/FT
☐ 5 W/FT
☐ 8 W/FT

RADIANCE

- ☐ DD - Direct (100%Down)
 *Light distribution.

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V*
 *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ *
 *Specify dimming protocol.

MOUNTING

- ☐ RS - Recessed
☐ RB - Recessed T-Bar

BEAM

- ☐ BF - Flood 50°
☐ BW - Wide 80°
☐ BA - Asymmetric

REFLECTOR

- ☐ SB - Black
☐ SW - White
☐ SR - Red
☐ SL - Silver
☐ SG - Gold
☐ SM - Gunmetal

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
 *RAL 9005
 **RAL 9016
 ***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ *
 *Specify required CCT.

OPTIONS

- ☐ No Options*
☐ EM - Emergency Battery Pack**
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth***
☐ JD - JDRF Autonomy Sensor (DA4)***
☐ DOS - Daylight & Occupancy Sensor (DLA)***
☐ AWN - Athena Wireless Node (DLA)***
 *Leave empty.
 **Battery Pack per 4 Ft section.
 ***Not available for sizes shorter than 4Ft.

LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
3W	395 lm	405 lm	415 lm
5W	660 lm	675 lm	690 lm
8W	1050 lm	1080 lm	1130 lm



Project:

Type:

SIZE:

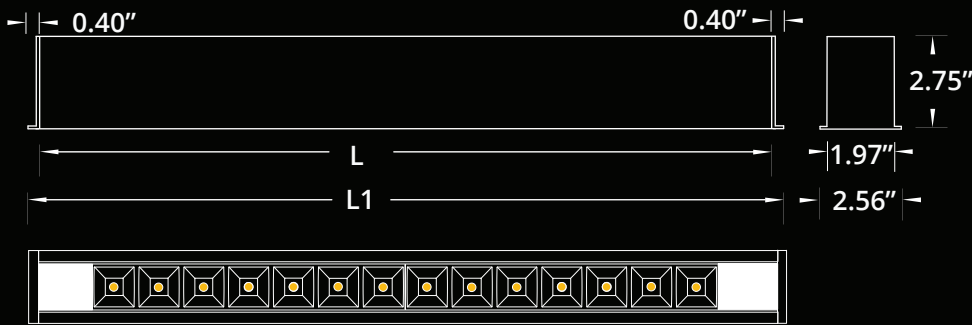

CONTINUOUS RUN:



Size	L	L1(T-BAR)
1 Ft	11.12 In	11.75 In
2 Ft	22.12 In	23.75 In
3 Ft	33.12 In	35.75 In
4 Ft	48.00 In	47.75 In
5 Ft	59.00 In	59.75 In
6 Ft	71.75 In	71.75 In
7 Ft	82.75 In	83.75 In
8 Ft	95.50 In	95.75 In

*Total length with endcaps = L + 0.22"

**Extrusion length included filler plate.

***1-3 Ft, no filler plate requires.

****4-8 Ft, filler plates at the end.


*****Continuous Run, filler plates in between & at the end.

*****For T-Bar installation with filler plates, L1 is the entire length with trim.

RADIANCE:



MOUNTING:

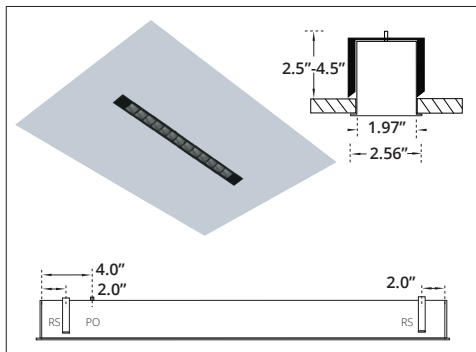


RECESSED

RS - Recessed Bracket

PO - Power Opening

*Cutout Dimensions = Total Length x Width of Extrusion.

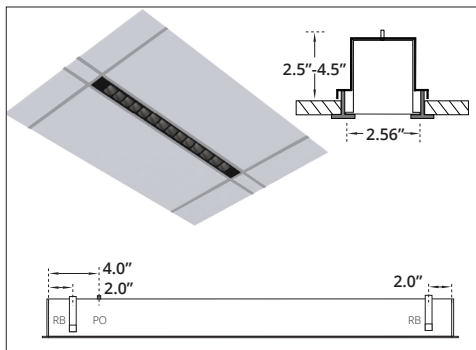


RECESSED T-BAR


RB - Recessed T-BAR Bracket

PO - Power Opening


BEAM:



FLOOD BEAM



WIDE BEAM



ASYMMETRIC BEAM

REFLECTORS:

SQUARE



WHITE



SILVER



BLACK



GOLD



RED



GUNMETAL

