



## FEATURES:

- ✓ Architectural luminaire with direct/indirect light distribution.
- ✓ Light source: LED boards (5.5"/11"/22").
- ✓ Luminaire shade combines polyester fabric fused to an acrylic sheet, creating a soft and diffused illumination with a built-in-driver.
- ✓ Double laminated finish includes a 2nd outer layer of clear acrylic for improved wipe-down and reduced dirt accumulation.
- ✓ Suitable for surface-mounted or suspended installations.
- ✓ Proven record in hospitality, long-term facilities, and healthcare projects.
- ✓ LED boards are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED MAR+**  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### SIZE

2 ft

### SOURCE

25 W  
 50 W

### RADIANCE

DI - Direct/Indirect<sup>1</sup>  
 1. 85% Down/15% Side

### VOLTAGE

UNV - 120/277V  
 347V<sup>1</sup>

1. Verify availability.  
 2. Functionality and controls may be limited.

### DRIVER

ST - On/Off  
 DL - 0-10V Dim (1%)  
 DLO - 0-10V Dim (to Off)  
 DL2 - 0-10V Dim (TW)  
 DLA - 0-10V Dim (Aux)  
 DA4 - DALI D4i  
 CV - Constant Voltage (RGBW)

Specify dimming protocol.

### MOUNTING

S6B - 6 ft Cord BK<sup>1</sup>  
 S6W - 6 ft Cord WH<sup>1</sup>  
 S  ft<sup>2</sup>  
 C6B - 6 ft Canopy BK<sup>1</sup>  
 C6W - 6 ft Canopy WH<sup>1</sup>  
 C  ft<sup>2</sup>  
 R2B - Stem 2 ft BK<sup>1</sup>  
 R2W - Stem 2 ft WH<sup>1</sup>  
 R  ft<sup>2</sup>  
 SF - Surface Mount

1. Canopy match the Cord color.  
 2. Specify Suspension length and color.

### LENS

OP - Opal

### FINISH

WH - White Linen<sup>1</sup>  
 BK - Black Linen<sup>2</sup>  
 GR - Grey Linen<sup>1</sup>  
 CL - Chocolate Linen<sup>2</sup>  
 JT - Jute<sup>1</sup>

1. White Top Plate & Power Cord  
 2. Black Top Plate & Power Cord

### CCT

30K - 3000 Kelvin/90CRI  
 35K - 3500 Kelvin/90CRI  
 40K - 4000 Kelvin/90CRI  
 RGBW<sup>1</sup>  
 TW - Tunable White (27K-65K)<sup>2</sup>

1. Available with DMX or CB.  
 2. Available with DL2, DA4 or CB.  
 Specify required CCT.

### OPTIONS

No Options<sup>1</sup>  
 2L - Double Lamination<sup>2</sup>  
 CB - Casambi Bluetooth(DL)  
 DMX - DMX (RGBW)  
 AWN - Athena Wireless Node (DLA)

1. Leave empty.  
 2. Anti-Microbial Finish


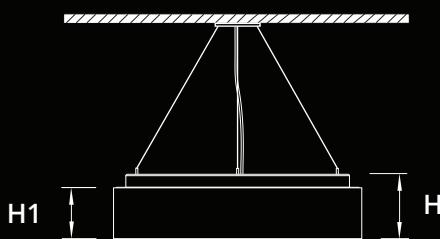
## LUMEN OUTPUT:

Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm

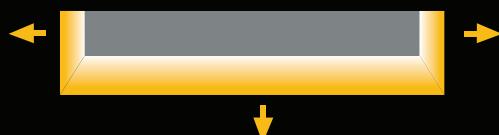


Project:

Type:

**SIZE:**


Size	2 ft
D - Diameter	24.00 in
H - Height	6.25 in
H1 - Height	5.00 in

**RADIANCE:**
**DIRECT/INDIRECT DISTRIBUTION**

**MOUNTING:**


SUSPENDED - (C) CANOPY




SUSPENDED - (S) STRAIGHT




SUSPENDED - (R) STEM




SURFACE MOUNT - (SF)

**SHADE FINISHES:**



WHITE LINEN



BLACK LINEN



GREY LINEN



CHOCOLATE LINEN



JUTE