
**FEATURES:**

- ✓ Architectural acoustic luminaire with direct/indirect lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

**reinventlight**
**SPECIFICATION:**
**Sonic VECTOR+**

TYPE	HEIGHT	SIZE	SOURCE	RADIANC	VOLTAGE	DRIVER	MOUNTING	LENS	VECTOR FINISH	CCT	ACOUSTIC
------	--------	------	--------	---------	---------	--------	----------	------	---------------	-----	----------

Enter the Product Code into the boxes above

**TYPE**

- FR - Flush Regular
- FV - Flush V-Cut
- FS - Square Edge
- FC - Curved Edge

**HEIGHT**

- 12 in
- 16 in
- 24 in

**SIZE**

- 4 ft
- 6 ft
- 8 ft

Specify custom size.

**SOURCE**

- 5 W/ft
- 7 W/ft
- 10 W/ft

**RADIANCE**

- DD - Direct<sup>1</sup>
- ID - Indirect<sup>2</sup>
- UD - Uneven<sup>3</sup>

1. 100%Down  
2. 100%Up  
3. 70%Down/30%Up

**VOLTAGE**

- UNV - 120/277V
- 347V<sup>1</sup>

<sup>1</sup> Verify availability.

**DRIVER**

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- CV - Constant Voltage (RGBW)
- 

Specify dimming protocol.

**MOUNTING**

- S6B - 6 ft Cord BK<sup>1</sup>
- S6W - 6 ft Cord WH<sup>1</sup>
- S   ft<sup>2</sup>

1. Canopy match the Cord Color  
2. Specify Suspension Length/color.

**LENS**

- OP - Opal

**ED VECTOR+ FINISH**

- BK - Black<sup>1</sup>
- WH - White<sup>2</sup>

1. RAL 9005  
2. RAL 9016

**CCT**

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

<sup>1</sup> Available with CV.

<sup>2</sup> Available with DL2.

Specify required CCT.

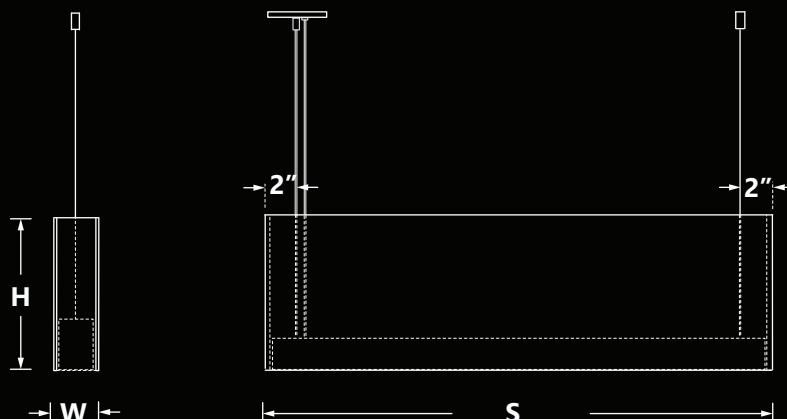
**ACOUSTIC FINISH**

Specify additional colour for Two-Tone.

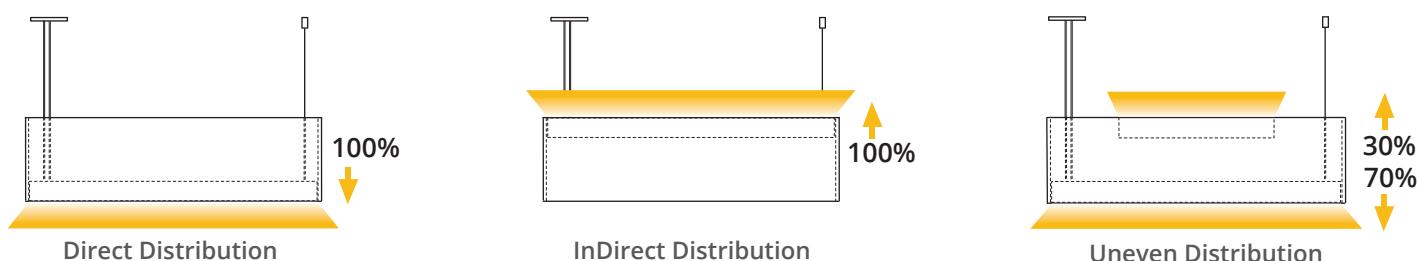
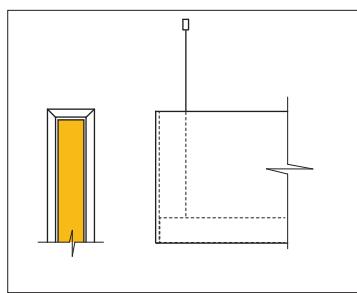
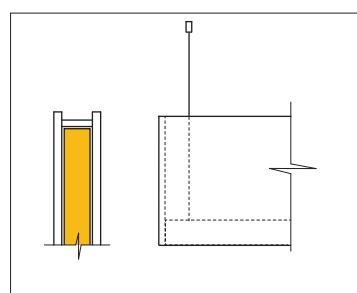
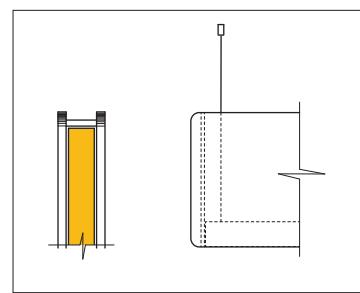


**LUMEN OUTPUT W/ft:**


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm


**Project:**
**Type:**

**SIZE:**


<b>W-Width</b>	3.00 in
<b>H-Height</b>	<b>S-Size</b>
12 in = 11.75 in	4 ft = 47.75 in
16 in = 15.75 in	6 ft = 71.75 in
24 in = 23.75 in	8 ft = 95.75 in

**RADIANCE:**

**TYPE:**

**FR - FLUSH REGULAR**

**FS - Square Edge**

**FC - Curved Edge**

**FR - Regular  
#04**

**FR - Two-Tone  
#04/#11**

**FS - Square Edge  
#04/#11**

**FC - Curved Edge  
#04/#11**