

FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:


Sonic VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above

<p>TYPE</p> <p><input type="checkbox"/> OS - Oval</p>	<p>HEIGHT</p> <p><input type="checkbox"/> 16 in <input type="checkbox"/> 18 in <input type="checkbox"/> 24 in</p>	<p>SIZE</p> <p><input type="checkbox"/> 36 in <input type="checkbox"/> 50 in <input type="checkbox"/> 62 in</p>	<p>SOURCE</p> <p><input type="checkbox"/> 5 W/ft <input type="checkbox"/> 7 W/ft <input type="checkbox"/> 10 W/ft</p>	<p>RADIANCE</p> <p><input type="checkbox"/> DD - Direct¹ <input type="checkbox"/> UD - Uneven² <small>1. 100%Down 2. 70%Down/30%Up</small></p>	<p>VOLTAGE</p> <p><input type="checkbox"/> UNV - 120/277V <input type="checkbox"/> 347V¹ <small>1. Verify availability.</small></p>
<p>DRIVER</p> <p><input type="checkbox"/> ST - On/Off <input type="checkbox"/> DL - 0-10V Dim (1%) <input type="checkbox"/> DLO - 0-10V Dim (to Off) <input type="checkbox"/> DL2 - 0-10V Dim (TW) <input type="checkbox"/> CV - Constant Voltage (RGBW) <input type="checkbox"/> <input type="text"/> <small>Specify dimming protocol.</small></p>	<p>MOUNTING</p> <p><input type="checkbox"/> S6B - 6 ft Cord BK¹ <input type="checkbox"/> S6W - 6 ft Cord WH¹ <input type="checkbox"/> S <input type="text"/> ft² <small>1. Canopy match the Cord Color 2. Specify Suspension Length/color.</small></p>	<p>LENS</p> <p><input type="checkbox"/> OP - Opal</p>	<p>ED VECTOR+ FINISH</p> <p><input type="checkbox"/> BK - Black¹ <input type="checkbox"/> WH - White² <small>1. RAL 9005 2. RAL 9016</small></p>	<p>CCT</p> <p><input type="checkbox"/> 30K - 3000 Kelvin/90CRI <input type="checkbox"/> 35K - 3500 Kelvin/90CRI <input type="checkbox"/> 40K - 4000 Kelvin/90CRI <input type="checkbox"/> RGBW¹ <input type="checkbox"/> TW - Tunable White (27K-65K)² <input type="checkbox"/> <input type="text"/> <small>1. Available with CV. 2. Available with DL2. Specify required CCT.</small></p>	

ACOUSTIC FINISH

Specify additional color for Two-Tone, for example 04/11.

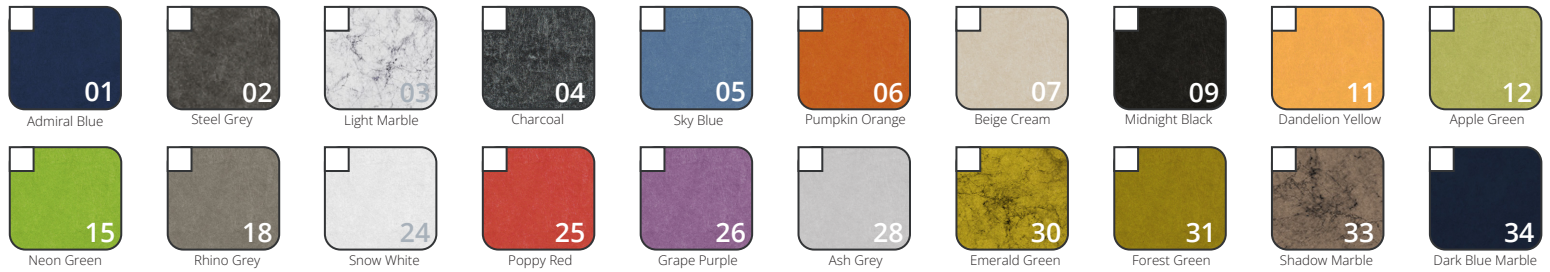

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Project:


Type:

SIZE:

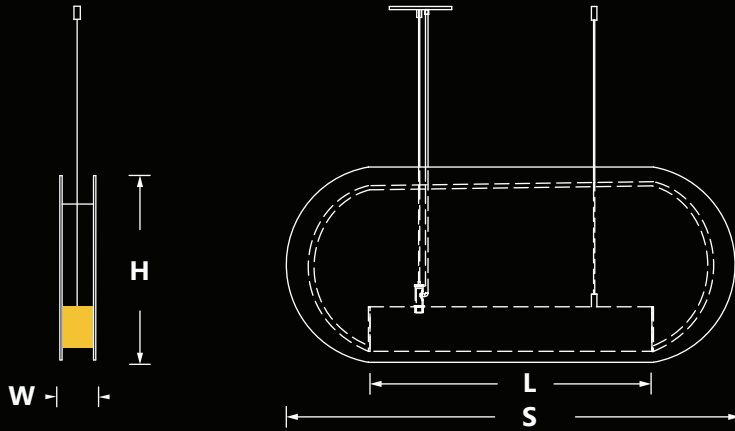


W - Width	H - Height
2.75 in	16 in = 15.75 in
	18 in = 17.75 in
	24 in = 23.75 in
S-Size	L - Luminaire Length
36 in	22.80 in
50 in	33.80 in
62 in	44.80 in

RADIANCE:

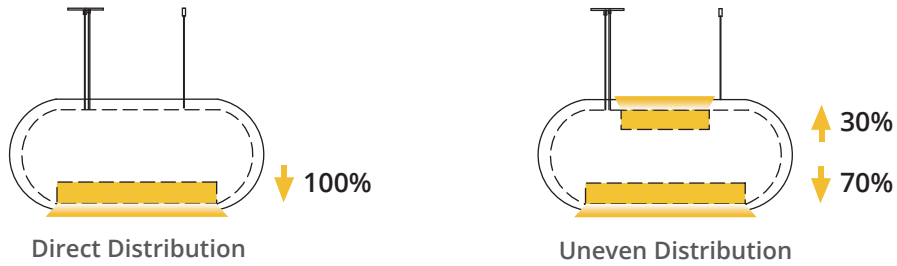


FINISHES:


Regular

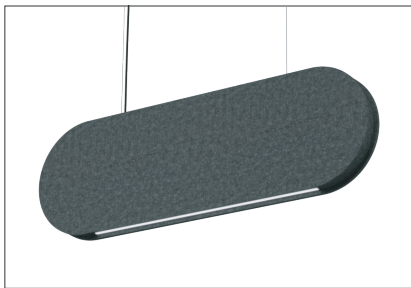

04

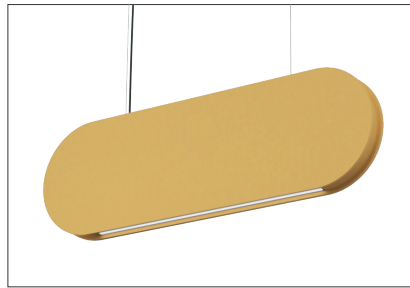


11

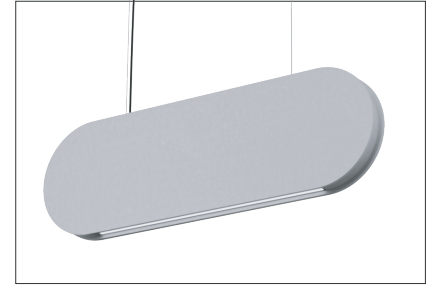


28

Two-Tone

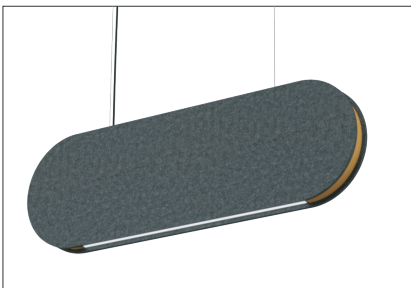

04/11

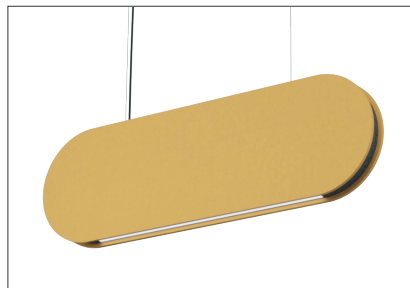

11/04



28/04