




FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Available with white aluminum or optional polycarbonate prismatic reflector.
- ✓ Suitable for suspended installation.
- ✓ Aluminum body with integrated driver.
- ✓ Available in black or white finish.
- ✓ LED spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office and commercial installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



SOURCE

- 17W LED
- 34W LED

RADIANCE

- DD - Direct (100% Down)
*Light Distribution

VOLTAGE

- 120V
 - 277V
 - 347V*
- *Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - *
- * Please specify dimming method.

MOUNTING

- S4-Suspension 4Feet
 - S6-Suspension 6Feet
 - S Feet*
- *Please specify required Length.

REFLECTOR


- AL - Aluminum
- PR - Prismatic

FINISH

- BK - Black
- WH - White

CCT

- 30K - 3000Kelvin/90CRI
 - 35K - 3500Kelvin/90CRI
 - 40K - 4000Kelvin/90CRI
- *Other options are available.

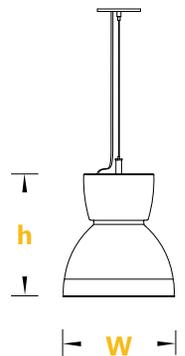

DIMENSIONS:

| Height | Width |
|--------|--------|
| 13.75" | 12.25" |

LUMEN OUTPUT:

| Watts | 30K | 35K | 40K |
|-------|---------|---------|---------|
| 17W | 1950 lm | 2000 lm | 2050 lm |
| 34W | 3900 lm | 4000 lm | 4100 lm |



Project:

Type: