

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency low glare integral reflector comes in the following beam angles: Narrow 15°, Medium Flood 35° and Flood 55°.
- ✓ Adjustable trim assembly can be tilted up to 30° for wall wash applications.
- ✓ Available with an optional flat frame plate for NC installations.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED SD+ — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

- ☐ 2x - Double

SOURCE

- ☐ 15 W
☐ 20 W
☐ 25 W

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐
 Specify required dimming method.

MOUNTING

- ☐ RT - Retrofit
☐ NC - New Const. Plate

BEAM

- ☐ BN - Narrow 15°
☐ BM - Medium 35°
☐ BF - Flood 55°

REFLECTOR

- ☐ MW - Matte White
☐ MB - Matte Black
☐ MS - Matte Silver

TRIM


- ☐ BK - Black¹
☐ WH - White²
 1. RAL 9005
 2. RAL 9003

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐
 Specify required CCT.

DIMENSIONS:

Size	Height	Width
Double	4.88 in	4.13 in
Length	Cut Out	
7.69 in	7.48 in x 3.82 in	

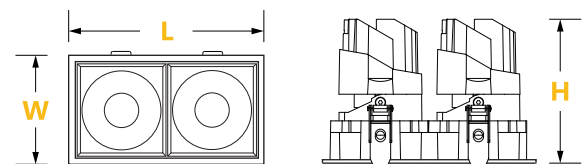

LUMEN OUTPUT:

Watts	30K	35K	40K
15 W	1425 lm	1455 lm	1485 lm
20 W	1900 lm	1940 lm	1980 lm
25 W	2375 lm	2425 lm	2475 lm



Project:

Type: