



FEATURES:

- ✓ Architectural luminaire with direct/indirect lighting distribution.
- ✓ Light source: COB LED.
- ✓ Extremely durable round diffusor is made from frosted PMMA polycarbonate for even lighting distribution.
- ✓ Steel body with built-in-driver, available in a black or white finish.
- ✓ Suitable for surface and wall mounted installations.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:



Enter the Product Code into the boxes above.

SOURCE

- 15 W
- 20 W
- 30 W

RADIANCE

- DI - Direct Indirect¹
- 1. 85% Down/15% Up

VOLTAGE

- UNV - 120/277V
- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DA4 - DALI D4i
-

Specify dimming protocol.

MOUNTING

- WM -Wall Mount
- CM-Ceiling Mount

LENS

- OP - Opal

FINISH

- BK - Black¹
- WH - White²

1. RAL 9005
2. RAL 9003

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
-


Specify required CCT.

DIMENSIONS:

Height	Width
2.375 in	11.50 in

LUMEN OUTPUT:

Watts	30K	35K	40K
15 W	1360 lm	1400 lm	1440 lm
20 W	1850 lm	1900 lm	1950 lm
30 W	2800 lm	2900 lm	3000 lm

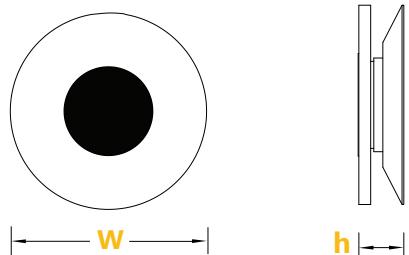

Project:

Type: