

## FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector is available with Narrow 15°, Medium 25° or Flood 40° beam angle.
- ✓ Available with optional flat frame plate for NC installation.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Round adjustable trim can rotate 350° or tilted up to 30°.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED AR+**

SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	BEAM	TRIM	CCT

Enter the Product Code into the boxes above.

### SOURCE

- ☐ 8 W
- ☐ 12 W

### RADIANCE

- ☐ DD - Direct (100% Down)
- \*Light Distribution.

### VOLTAGE

- ☐ UNV - 120/277V
  - ☐ 347V\*
- \*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off
  - ☐ DL - 0-10V Dim (1%)
  - ☐  \*
- \*Specify required dimming method.

### MOUNTING

- ☐ RT - Retrofit
- ☐ NC - New Const. Plate

### BEAM

- ☐ BN - Narrow 15°
- ☐ BM - Medium 25°
- ☐ BF - Flood 40°

### TRIM

- ☐ BK - Black
- ☐ WH - White

### CCT


- ☐ 30K - 3000 Kelvin/90CRI
  - ☐ 35K - 3500 Kelvin/90CRI
  - ☐ 40K - 4000 Kelvin/90CRI
  - ☐  \*
- \*Specify required CCT.

## DIMENSIONS:

Height	Width	Cut Out
3.625"	3.36"	2.937"

## LUMEN OUTPUT:

Watts	30K	35K	40K
8 W	700 lm	720 lm	740 lm
12 W	1050 lm	1080 lm	1110 lm

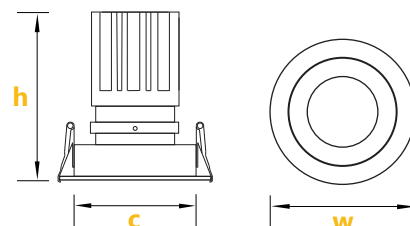

Project:

Type: