

## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Flood 50°/10UGR or Wide Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED SQUARE+**  -  -  -  -  -  -  -  -  -  -  - 

Enter the Product Code into the boxes above.

TYPE	SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	BEAM	REFLECTOR	FINISH	CCT	OPTION
<input type="checkbox"/> DO - Dark Optic	<input type="checkbox"/> <input type="text"/> ft 2-8 ft Arm length.	<input type="checkbox"/> 3 W/ft <input type="checkbox"/> 5 W/ft <input type="checkbox"/> 8 W/ft	<input type="checkbox"/> DD - Direct	<input type="checkbox"/> UNV - 120/277V <input type="checkbox"/> 347V <sup>1</sup>	<input type="checkbox"/> ST - On/Off <input type="checkbox"/> DL - 0-10V Dim (1%) <input type="checkbox"/> DLO - 0-10V Dim (to Off) <input type="checkbox"/> DLA - 0-10V Dim (Aux) <input type="checkbox"/> DA4 - DALI D4i <input type="checkbox"/> <input type="text"/>	<input type="checkbox"/> S6B - 6ft Cord BK <sup>1</sup> <input type="checkbox"/> S6W - 6ft Cord WH <sup>1</sup> <input type="checkbox"/> S <input type="text"/> Feet <sup>2</sup> <input type="checkbox"/> SF - Surface Mount <input type="checkbox"/> RT - Recessed Trimless					
					1. Verify availability.						

<sup>1</sup> Canopy match the Cord color.  
<sup>2</sup> Specify Suspension length/color.

BEAM	REFLECTOR	FINISH	CCT	OPTIONS
<input type="checkbox"/> BF - Flood 50° <input type="checkbox"/> BW - Wide 80°	<input type="checkbox"/> SB - Black <input type="checkbox"/> SW - White <input type="checkbox"/> SR - Red <input type="checkbox"/> SL - Silver <input type="checkbox"/> SG - Gold <input type="checkbox"/> SM - Gunmetal	<input type="checkbox"/> BK - Black <sup>1</sup> <input type="checkbox"/> WH - White <sup>2</sup> <input type="checkbox"/> CF/RAL <input type="text"/> 1. RAL 9005 2. RAL 9016 Specify required RAL number.	<input type="checkbox"/> 30K - 3000 Kelvin/90CRI <input type="checkbox"/> 35K - 3500 Kelvin/90CRI <input type="checkbox"/> 40K - 4000 Kelvin/90CRI <input type="checkbox"/> <input type="text"/> Specify required CCT.	<input type="checkbox"/> No Options <sup>1</sup> <input type="checkbox"/> EC - Emergency Circuit <input type="checkbox"/> CB - Casambi Bluetooth <input type="checkbox"/> JD - JDRF Autonomy Sensor (DA4) <input type="checkbox"/> DOS - Daylight & Occupancy Sensor (DLA) <input type="checkbox"/> AWN - Athena Wireless Node (DLA) <input type="checkbox"/> Leave empty.

## LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
3 W	395 lm	405 lm	415 lm
5 W	660 lm	675 lm	690 lm
8 W	1050 lm	1080 lm	1130 lm



Declare.

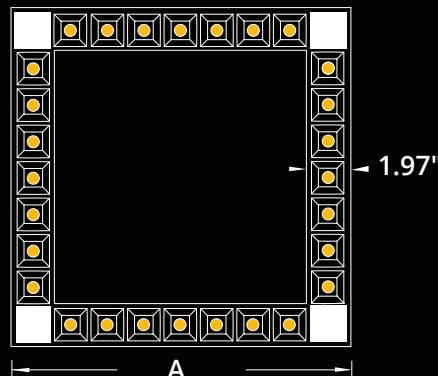
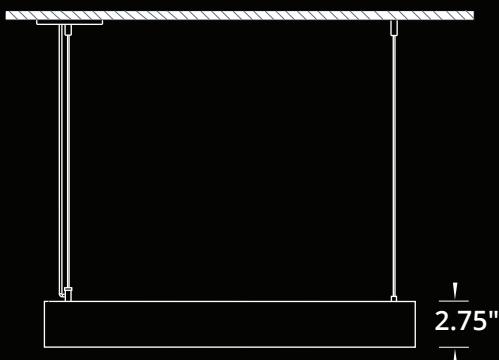
Project:

Type:

905-830-0339 / 1-800-667-9281



info@edisonlighting.ca

www.edisonlighting.ca

**SIZE:**


Size	A
2 ft	26.50 in
3 ft	37.50 in
4 ft	48.50 in
5 ft	59.50 in
6 ft	70.50 in
7 ft	81.50 in
8 ft	92.50 in

A - Arm Length includes the filler plate.

**BEAM ANGLE:**

**REFLECTORS:**
**SQUARE**


WHITE



SILVER



BLACK



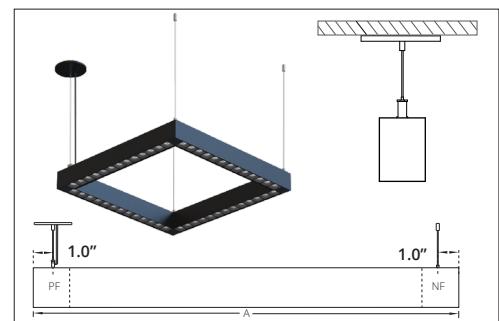
GOLD

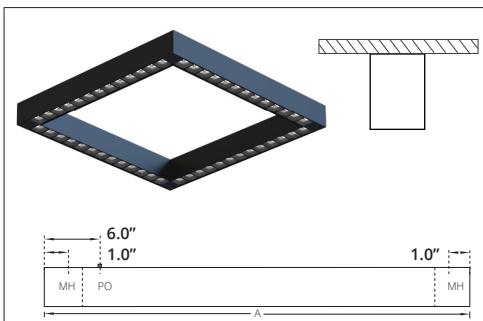


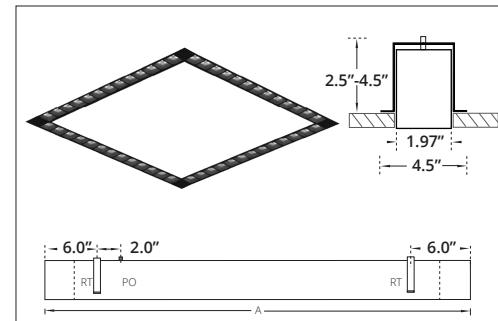
RED



GUNMETAL

**MOUNTING:**

**SUSPENDED**

 PF - Power Feed  
 NF - Non Power Feed

**SURFACE MOUNT**

 MH - Mounting Hole  
 PO - Power Opening

**RECESSED TRIMLESS**

 RT - Recessed Trimless Bracket  
 PO - Power Opening  
 Cutout Dimensions = Arm Length x Width of Extrusion.