


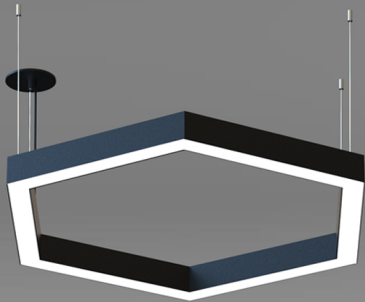

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED HEXAGON+ — — — — — — — — — —

Enter the Product Code into the boxes above.

_____ ft
2-9 ft.

SOURCE

- ☐ 5 W/ft
☐ 7 W/ft
☐ 10 W/ft

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V ¹
1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐
Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK ¹
☐ S6W - 6ft Cord WH ¹
☐ S ft ²
☐ SF - Surface Mount
☐ RT - Recessed Trimless
1. Canopy match the Cord color.
2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐
1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth(TW, RGBW)
☐ DMX - DMX (RGBW)
☐ JD - JDRF Autonomy Sensor (DA4)
☐ DOS - Daylight & Occupancy Sensor (DLA)
☐ AWN - Athena Wireless Node (DLA)
1. Leave empty.

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Declare.


Project:

Type:


SIZE:

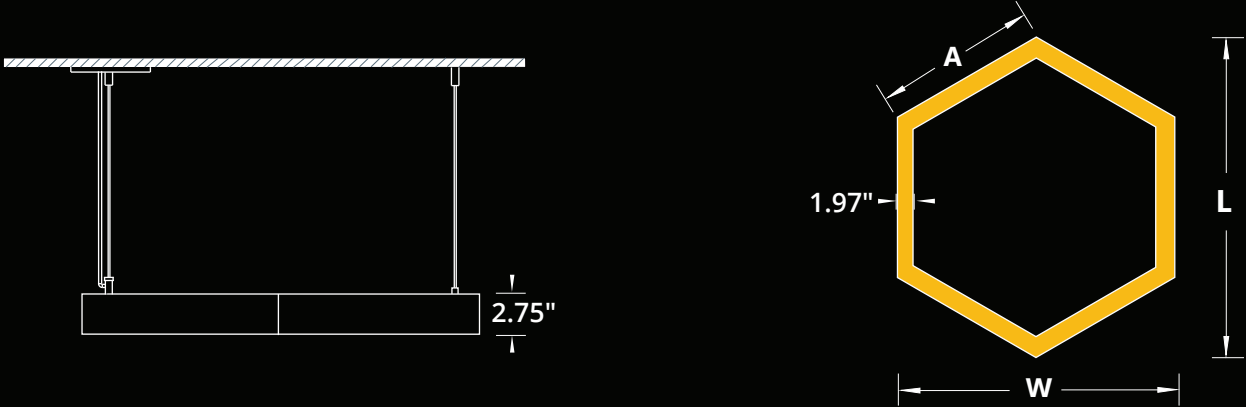

RADIANCE:




MOUNTING:

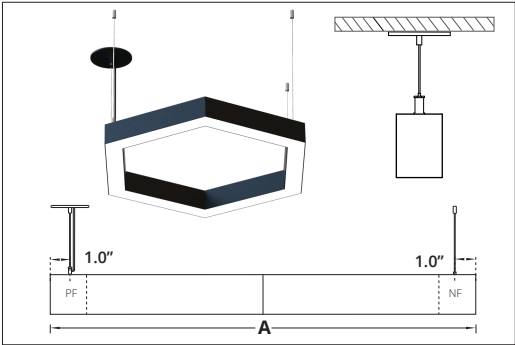

SUSPENDED

PF - Power Feed

NF - Non Power Feed

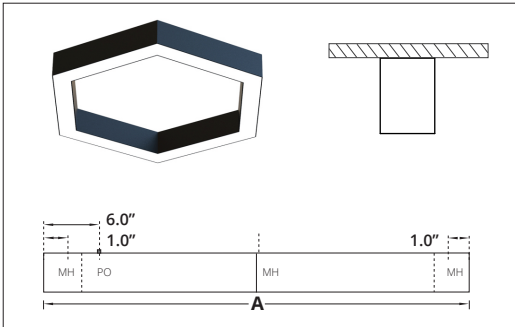

SURFACE MOUNT

PO - Power Opening

MH - Mounting Hole


Size	Arm - A		L x W ¹
2 ft	1.0 ft	12.84 in	25.67 x 22.23
3 ft	1.5 ft	18.34 in	36.67 x 31.76
4 ft	2.0 ft	25.60 in	51.17 x 31.76
5 ft	2.5 ft	31.08 in	62.17 x 53.84
6 ft	3.0 ft	35.60 in	73.17 x 63.37
7 ft	3.5 ft	42.08 in	84.17 x 72.90
8 ft	4.0 ft	49.34 in	98.67 x 85.45
9 ft	4.5 ft	54.84 in	109.67 x 94.98

A - Arm Length

L - Total Length

W - Total Width

1. All dimensions are in Inches.

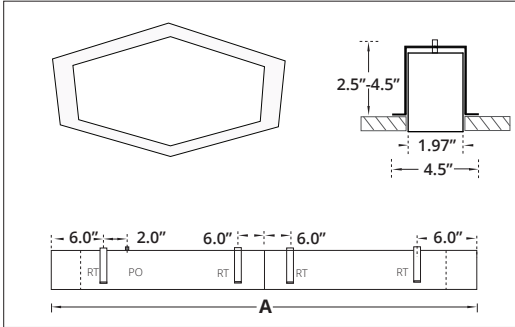

RECESSED TRIMLESS

PO - Power Opening

RT - Recessed Trimless Bracket

Cutout Dimensions = Total Length x Width of Extrusion.