



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency opal insert or an optional low glare microprismatic lens.
- ✓ Suitable for suspended and row mounted installations.
- ✓ Fixture body with integrated driver is made from lightweight steel.
- ✓ Available with a matt black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial applications.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED EDGE+



Enter the Product Code into the boxes above.

SOURCE

- 35 W
- 45 W

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
-

Specify dimming protocol.

MOUNTING

- S6B - 6 ft Cord BK¹
- S6W - 6 ft Cord WH¹
- S ft²
- SF - Surface Mount

1. Canopy match the Cord color.

2. Specify required length/color.

LENS

- OP - Opal
- PR - Prismatic

FINISH

- BK - Black¹
- WH - White²

1. RAL 9005

2. RAL 9003

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

1. Available with DMX or CB.

2. Available with DL2, DA4 or CB.

Specify required CCT.

OPTIONS

- No Options¹
- EC - Emergency Circuit
- CB - Casambi Bluetooth(TW, RGBW)
- DMX - DMX (RGBW)
- JD - JDRF Autonomy Sensor (DA4)
- DOS - Daylight & Occupancy Sensor (DLA)
- AWN - Athena Wireless Node (DLA)
-


1. Leave empty.

DIMENSIONS:

Length	Width	Height
47.25 in	7.125 in	2.250 in

LUMEN OUTPUT:

Watts	30K	35K	40K
35 W	3420 lm	3500 lm	3580 lm
45 W	4400 lm	4500 lm	4600 lm

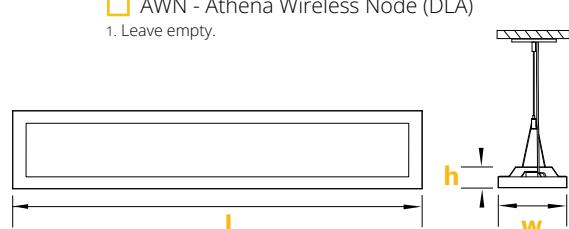

Project:

Type: