


FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution.
- ✓ Circular internal louver is available in a black or white finish.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight
SPECIFICATION:
Sonic TUBE+

| | | | | | | | | | | |
|------|--------|--------|---------|---------|--------|----------|-----------|-------------|-----|----------|
| TYPE | HEIGHT | SOURCE | RADIANC | VOLTAGE | DRIVER | MOUNTING | REFLECTOR | TUBE FINISH | CCT | ACOUSTIC |
|------|--------|--------|---------|---------|--------|----------|-----------|-------------|-----|----------|

Enter the Product Code into the boxes above.

TYPE
 CS - Cylinder

HEIGHT
 12 in
 16 in
 24 in

SOURCE
 15 W
 20 W
 25 W

RADIANCE
 DD - Direct

VOLTAGE
 UNV - 120/277V

DRIVER
 ST - On/Off
 DL - 0-10V Dim (1%)
 DA4 - DALI D4i

Specify dimming protocol.

MOUNTING
 S6B - 6 ft Cord BK¹
 S6W - 6 ft Cord WH¹
 S ft²
REFLECTOR
 BR - Black
 WR - White

ED TUBE+ FINISH
 BK - Black¹
 WH - White²
 1. RAL 9005
 2. RAL 9003

CCT
 30K - 3000 Kelvin/90CRI
 35K - 3500 Kelvin/90CRI
 40K - 4000 Kelvin/90CRI

Specify required CCT.

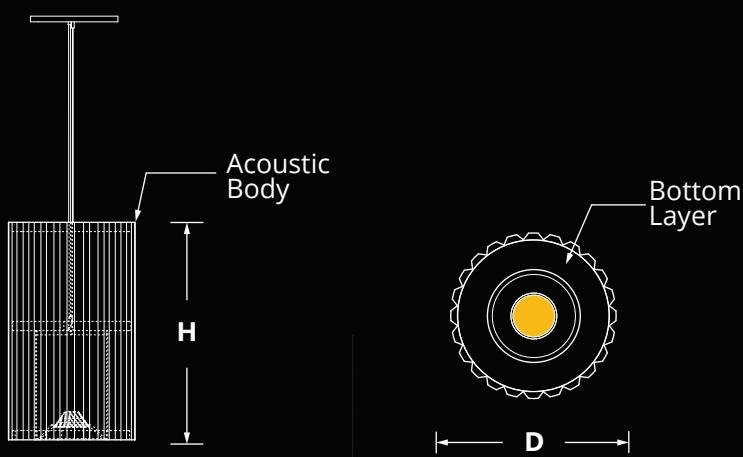
ACOUSTIC FINISH

Specify Acoustic Body & Bottom Layer, For example (11/04)


LUMEN OUTPUT:

| Watts | 30K | 35K | 40K |
|-------|---------|---------|---------|
| 15 W | 1400 lm | 1430 lm | 1460 lm |
| 20 W | 1910 lm | 1950 lm | 1990 lm |
| 25 W | 2350 lm | 2400 lm | 2450 lm |


Project:
Type:

SIZE:


| H - Height | Diameter |
|------------------|----------|
| 12 in = 11.75 in | 8.00 in |
| 16 in = 15.75 in | 8.00 in |
| 24 in = 23.75 in | 8.00 in |

FINISHES:


11/04



05/04



25/04



26/04



03/04



01/04



09/25



12/24