

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high-efficiency opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VERTEX+ ANGLE SIZE SOURCE RADIANCE VOLTAGE DRIVER MOUNTING LENS FINISH CCT OPTIONS

Enter the Product Code into the boxes above.

ANGLE

- 60°
- 90°
- 120°

SIZE

_____ ft
2-8 ft Arm length.

SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
 - 347V¹
1. Verify availability.

DRIVER

- ST - On/Off
 - DL - 0-10V Dim (1%)
 - DLO - 0-10V Dim (to Off)
 - DL2 - 0-10V Dim (TW)
 - DLA - 0-10V Dim (Aux)
 - DA4 - DALI D4i
 - CV - Constant Voltage (RGBW)
 -
- Specify dimming protocol.

MOUNTING

- S6B - 6ft Cord BK ¹
- S6W - 6ft Cord WH ¹
- S ft ²
- SF - Surface Mount
- RT - Recessed Trimless

1. Canopy match the Cord color.
2. Specify Suspension length/color.

LENS

- OP - Opal

FINISH

- BK - Black¹
 - WH - White²
 - CF/RAL
1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- No Options¹
 - EC - Emergency Circuit
 - CB - Casambi Bluetooth(TW, RGBW)
 - DMX - DMX (RGBW)
 - JD - JDRF Autonomy Sensor (DA4)
 - DOS - Daylight & Occupancy Sensor (DLA)
 - AWN - Athena Wireless Node (DLA)
1. Leave empty.

LUMEN OUTPUT W/ft:



Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Project:

Type:

SIZE:

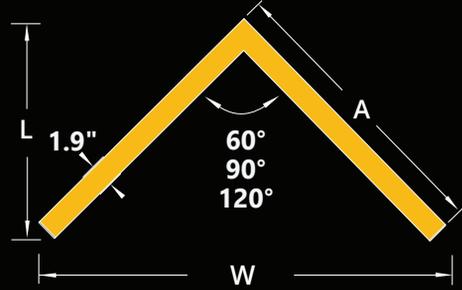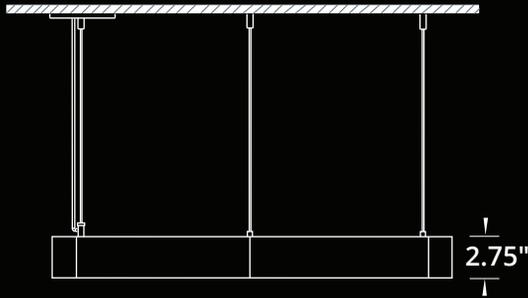


RADIANCE:

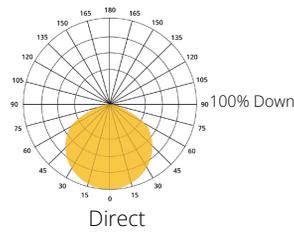


Angle	60°		90°		120°	
Size	A	L x W	A	L x W	A	L x W
2 ft	26.22	23.60 x 26.10	25.49	19.34 x 35.90	25.07	14.19 x 43.25
3 ft	37.22	33.12 x 37.10	36.99	27.12 x 51.46	36.07	19.69 x 62.30
4 ft	49.97	44.16 x 49.85	49.24	36.14 x 69.49	48.83	26.06 x 84.38
5 ft	60.97	53.68 x 60.85	60.24	43.91 x 85.04	59.83	31.56 x 103.44
6 ft	73.72	64.73 x 73.60	72.94	52.93 x 103.10	72.57	37.94 x 125.52
7 ft	84.72	74.25 x 84.60	83.99	60.71 x 118.63	83.57	43.44 x 144.57
8 ft	97.47	85.30 x 97.35	96.74	69.72 x 136.66	96.33	49.81 x 166.65

A - Arm Length
L - Total Length
W - Total Width
All dimensions are in Inches.


MOUNTING:

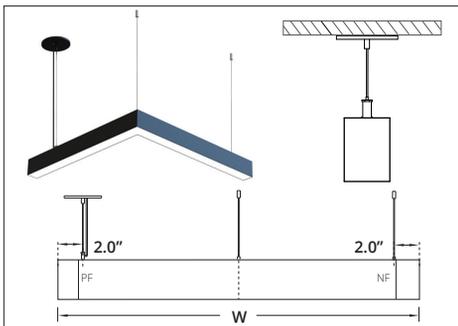

SUSPENDED
PF - Power Feed
NF - Non Power Feed

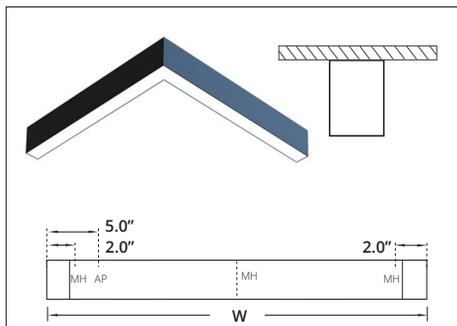

SURFACE MOUNT
AP - Access Power Plate
MH - Mounting Hole

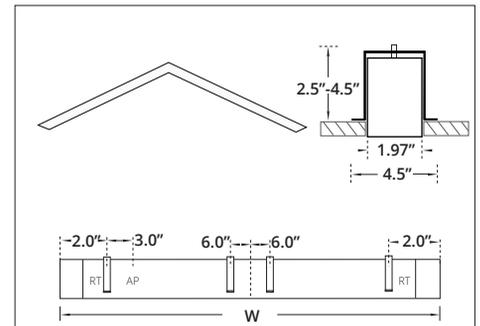

RECESSED TRIMLESS

AP - Access Power Plate
RT - Recessed Trimless Bracket
Cutout Dimensions = Arm Lengths x Width of Extrusion.