

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector is available with Narrow 15°, Medium 25° or Flood 40° beam angle.
- ✓ Available with optional flat frame plate for NC installation.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Round adjustable trim can rotate 350° or tilted up to 30°.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED AR+ SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — BEAM — TRIM — CCT

Enter the Product Code into the boxes above.

SOURCE

- 12 W

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
 - 347V¹
1. Verify availability.

DRIVER

- ST - On/Off
 - DL - 0-10V Dim (1%)
 -
- Specify dimming protocol.

MOUNTING

- RT -Retrofit
- NC- New Const. Plate

BEAM

- BN - Narrow 15°
- BM - Medium 25°
- BF - Flood 40°

TRIM

- BK - Black¹
 - WH - White²
1. RAL 9005
2. RAL 9003

CCT


- 30K - 3000 Kelvin/90CRI
 - 35K - 3500 Kelvin/90CRI
 - 40K - 4000 Kelvin/90CRI
 -
- Specify required CCT.

DIMENSIONS:

Height	Width	Cut Out
3.625 in	3.36 in	2.937 in

LUMEN OUTPUT:

Watts	30K	35K	40K
12 W	1050 lm	1080 lm	1110 lm

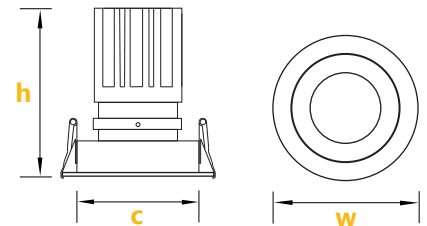


Project:

Type:



DRIVER BOX:

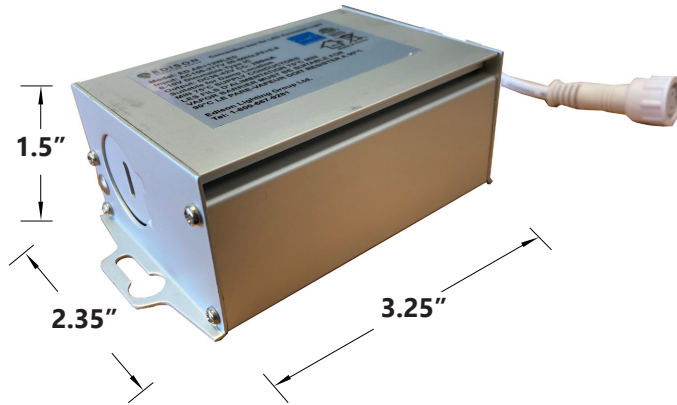

NC PLATE:

