



### FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED 5.5" board.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum sides with laser-cut metal top enclosure.
- ✓ Suitable for suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

### SPECIFICATION:

#### ED RING+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

#### SIZE

- ☐ 2 Ft
- ☐ 3 Ft
- ☐ 4 Ft
- ☐  \*

\*Specify custom size.

#### SOURCE

- ☐ 25 W
- ☐ 50 W
- ☐ 75 W\*

\*Available for 4Ft & Custom sizes.  
\*\*Other Wattages are available.

#### RADIANCE

- ☐ DD - Direct (100% Down)
- ☐ UD - Uneven(70% Down/30% Up)\*\*

\*Light Distribution.  
\*\*Suspended Configuration only.

#### VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V\*

\*Not available for all configurations.

#### DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DA4 - DALI D4i
- ☐  \*

\*Specify dimming protocol.

#### MOUNTING

- ☐ C6W - 6 Ft Canopy WH\*
- ☐ C6B - 6 Ft Canopy BK\*
- ☐ C  Ft\*
- ☐ S6W - 6 Ft Cord WH\*
- ☐ S6B - 6 Ft Cord BK\*
- ☐ S  Ft\*\*
- ☐ WM - Wall Mount
- ☐ SF - Surface Mount

\*Canopy will match the Cord color.  
\*\*Specify Suspension length and color.

#### LENS

- ☐ OP - Opal

#### FINISH

- ☐ BK - Black\*
- ☐ WH - White\*\*
- ☐ CF/RAL  \*\*\*

\*RAL 9005  
\*\*RAL 9003  
\*\*\*Specify required RAL number.

#### CCT

- ☐ 30K - 3000Kelvin//90CRI
- ☐ 35K - 3500Kelvin/90CRI
- ☐ 40K - 4000Kelvin/90CRI
- ☐ TW - Tunable White\*  
(2700K-6500K)
- ☐  \*\*

\*Available with BT control.  
\*\*Other options are available.

#### OPTIONS

- ☐ No Options\*
- ☐ DC - Dual Circuit\*\*
- ☐  \*\*\*

\*Leave empty.  
\*\*Control Downlight/Uplight separately.  
\*\*\*Specify required option.

### LUMEN OUTPUT:

Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm
75 W	6610 lm	6750 lm	6890 lm





Declare.

Project:



Type:

SIZE:

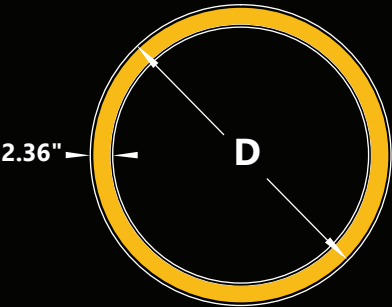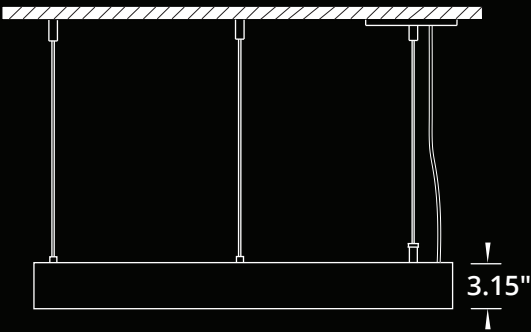

Size	Diameter
2 Ft	25.98 In
3 Ft	35.43 In
4 Ft	47.24 In

RADIANCE:




MOUNTING:




SUSPENDED - STRAIGHT WIRE



SUSPENDED - CEILING CANOPY

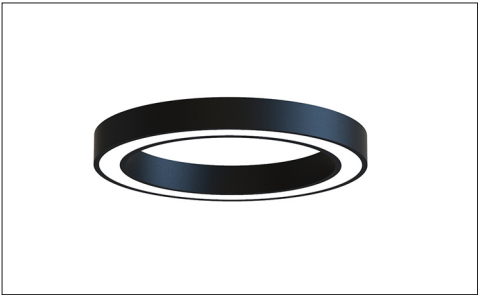

SURFACE MOUNT

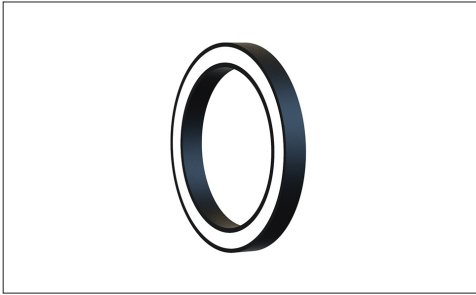

WALL MOUNT