



**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Available with Spot 25°, Flood 45° and Wide Flood 60° beam angle.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for suspended installations.
- ✓ LED Spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED PIPE+**  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  REFLECTOR —  FINISH —  CCT

Enter the Product Code into the boxes above.

**SOURCE**

- 10W LED
- 15W LED
- 20W LED

**RADIANCE**

- DD - Direct (100%Down)  
\*Light Distribution.

**VOLTAGE**

- 120V
- 277V

**DRIVER**

- ST - Standard (Non-Dimming)
  - DL - 0-10V Dimming (1%)
  - DA - DALI
  - \*
- \* Please specify dimming method.

**MOUNTING**

- S4 - Suspension 4Feet
  - S6 - Suspension 6Feet
  - S  Feet\*
- \* Please specify required Length.

**REFLECTOR**

- SP - Spot
- FL - Flood
- WF - Wide Flood

**FINISH**

- BK - Black
- WH - White

**CCT**


- 30K - 3000Kelvin/90CRI
  - 35K - 3500Kelvin/90CRI
  - 40K - 4000Kelvin/90CRI
- \*Other options are available.

**DIMENSIONS:**

Width	Height	Canopy
4.0"	11.0"	5.0"

**LUMEN OUTPUT:**

Watts	30K	35K	40K
10W	930 lm	950 lm	990 lm
15W	1395 lm	1425 lm	1475 lm
20W	1860 lm	1900 lm	1940 lm

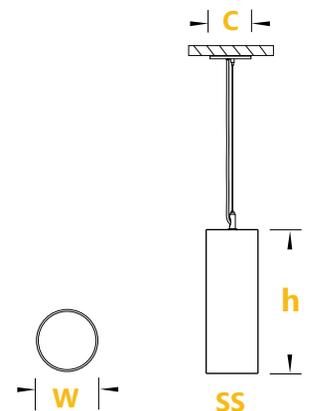

Project:

Type:

