

## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**

## SPECIFICATION:

**ED SQUARE+**  SIZE —  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  LENS —  FINISH —  CCT —  OPTIONS

Enter the order code into the boxes above.

### SIZE

- ☐  Ft\*
- \*1-8 Ft Arm length.

### SOURCE

- ☐ 5W/Ft
- ☐ 7W/Ft
- ☐ 10W/Ft

### RADIANCE

- ☐ DD - Direct (100% Down)
- \*Light distribution.

### VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V\*
- \*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DL2 - 0-10V Dimming (2 Channels)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐  \*
- \*Specify dimming protocol.

### MOUNTING

- ☐ S6W - 6Ft Cord WH\*
- ☐ S6B - 6Ft Cord BK\*
- ☐ S  Ft\*\*
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless
- \*Canopy will match the Cord color.
- \*\*Specify Suspension length and color.

### LENS

- ☐ OP - Opal
- ☐ PR - Prismatic

### FINISH

- ☐ BK - Black\*
- ☐ WH - White\*\*
- ☐ CF/RAL  \*\*\*
- \*RAL 9005
- \*\*RAL 9016
- \*\*\*Specify required RAL number.

### CCT

- ☐ 30K - 3000Kelvin//90CRI
- ☐ 35K - 3500Kelvin/90CRI
- ☐ 40K - 4000Kelvin/90CRI
- ☐ TW - Tunable White\* (2700K-6500K)
- ☐  \*\*
- \*Available with 0-10V, Dali or Bluetooth controls.
- \*\*Specify required CCT.

### OPTIONS

- ☐ No Options\*
- ☐ DR - Damp Rated
- ☐ CB - Casambi/Bluetooth
- ☐  \*\*
- \*Leave empty.
- \*\*Specify required option.

## LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm





Declare.

Project:

Type:


SIZE:

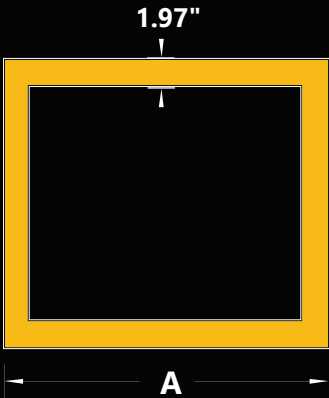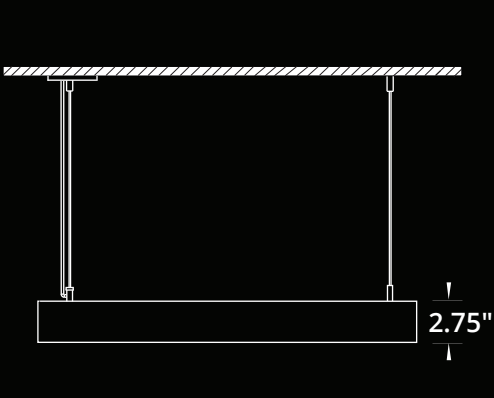


Size	A
1 Ft	13.67 In
2 Ft	26.42 In
3 Ft	37.42 In
4 Ft	50.20 In
5 Ft	61.20 In
6 Ft	73.92 In
7 Ft	84.92 In
8 Ft	97.67 In

\*A - Arm Length


RADIANCE:




MOUNTING:

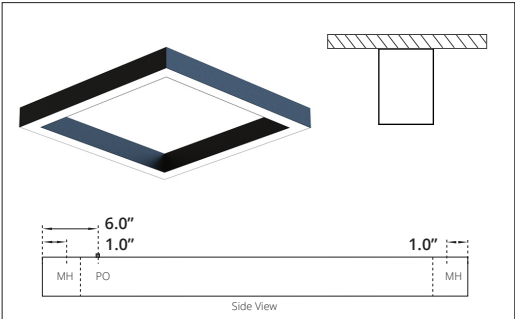


**SURFACE MOUNT**  
MH - Mounting Hole  
PO - Power Opening

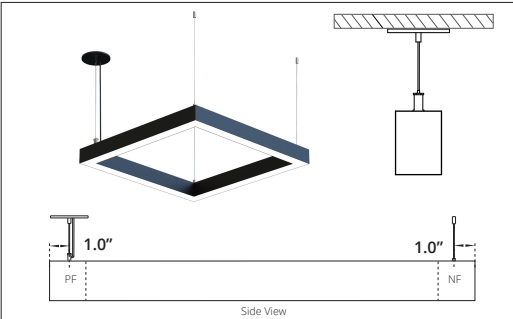

**SUSPENDED**  
PF - Power Feed  
NF - Non Power Feed

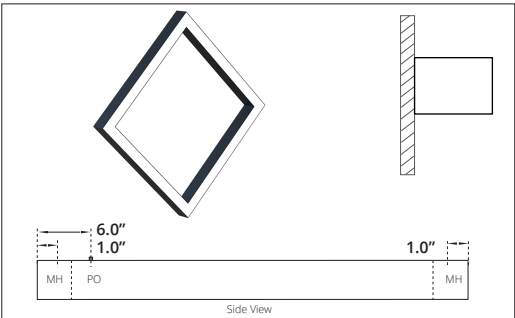

**WALL FLUSH**  
MH - Mounting Hole  
PO - Power Opening

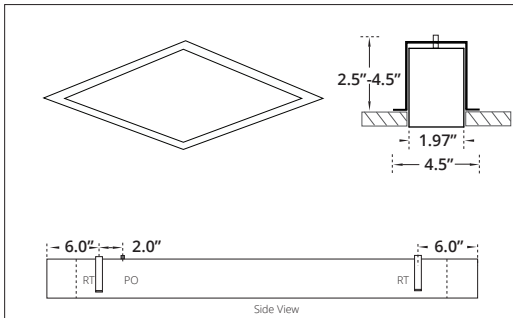

**RECESSED TRIMLESS**  
RT - Recessed Trimless Bracket  
PO - Power Opening  
\*Cutout Dimensions = Total Length x Width of Extrusion.