


FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed or wall mounted installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

SPECIFICATION:



Enter the Product Code into the boxes above.

SIZE

_____ ft
1-8 ft
Continuous Run
(0.5 ft Increments)

SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

RADIANCE

- DD - Direct
 - ID - Indirect only
 - UD - Uneven¹
1. Available in sizes 4 ft and up.

VOLTAGE

- UNV - 120/277V
 - 347V¹
1. Verify availability.

DRIVER

- ST - On/Off
 - DL - 0-10V Dim (1%)
 - DLO - 0-10V Dim (to Off)
 - DL2 - 0-10V Dim (TW)
 - DLA - 0-10V Dim (Aux)
 - DA4 - DALI D4i
 - CV - Constant Voltage (RGBW)
 -
- Specify dimming protocol.

MOUNTING

- S6B - 6 ft Cord BK¹
- S6W - 6 ft Cord WH¹
- S ft²
- WM - Wall Mount
- WF - Wall Flush
- SF - Surface Mount
- RT - Recessed Trimless

1. Canopy match the Cord color.
2. Specify Suspension length/color.

LENS

- OP - Opal
- AS - Asymmetric
- PR - Prismatic

FINISH

- BK - Black¹
 - WH - White²
 - CF/RAL
1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- No Options¹
- EM - Emergency Battery Pack²
- DC - Dual Circuit³
- EC - Emergency Circuit
- DR - Damp Rated
- CB - Casambi Bluetooth(TW, RGBW)⁴
- DMX - DMX (RGBW)
- JD - JDRF Autonomy Sensor (DA4)⁴
- DOS - Daylight & Occupancy Sensor (DLA)⁴
- AWN - Athena Wireless Node (DLA)⁴

1. Leave empty.
2. Battery Pack per 4 ft section.
3. Control Downlight/Uplight separately.
4. Available in sizes 4 ft and up.

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Project:


Type:

SIZE:

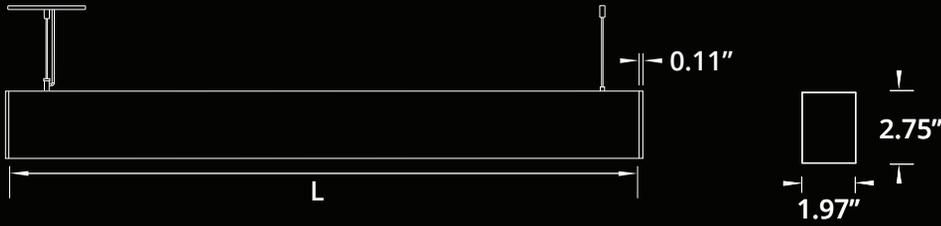

Size	L
1 ft	11.50 in
2 ft	24.25 in
3 ft	35.25 in
4 ft	48.00 in
5 ft	59.00 in
6 ft	71.75 in
7 ft	82.75 in
8 ft	95.50 in


CONTINUOUS RUN:

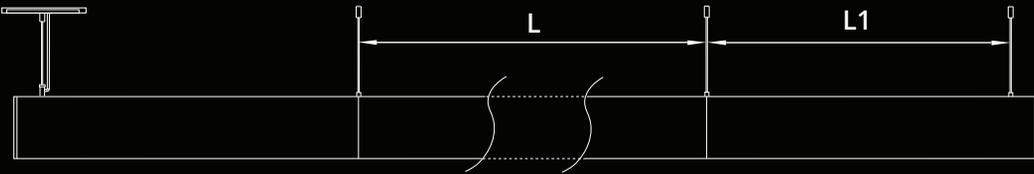


L - Linear extrusion length only.
Total length with Endcaps = L + (2 x 0.11)

Continuous Run suspension dimensions
L1 = L - 2.0 in


RADIANCE:

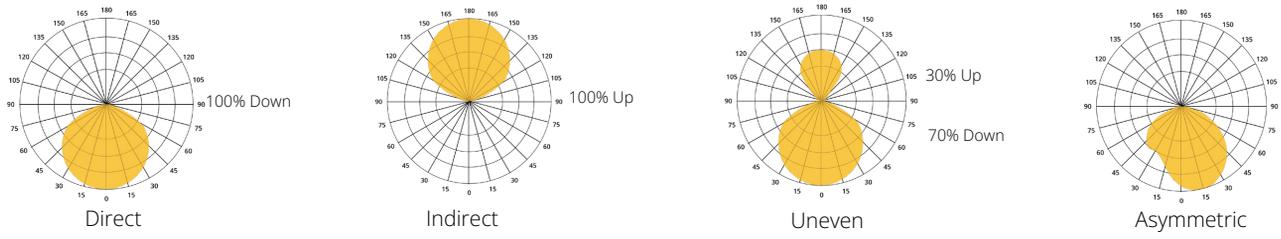


MOUNTING:

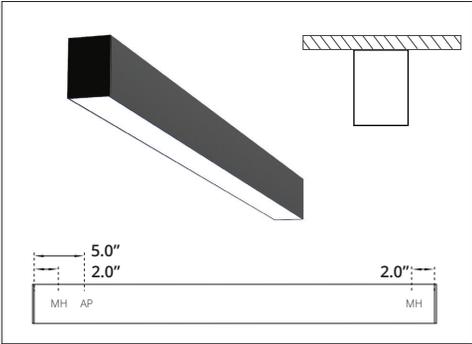


SURFACE MOUNT
AP - Access Power Plate
MH - Mounting Hole

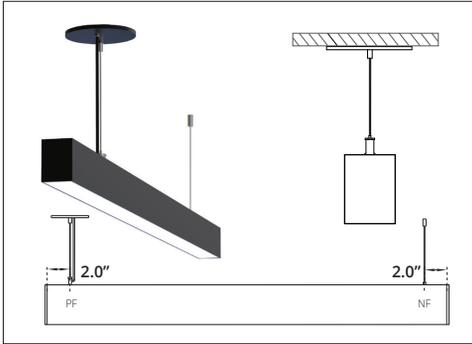


SUSPENDED
PF - Power Feed
NF - Non Power Feed

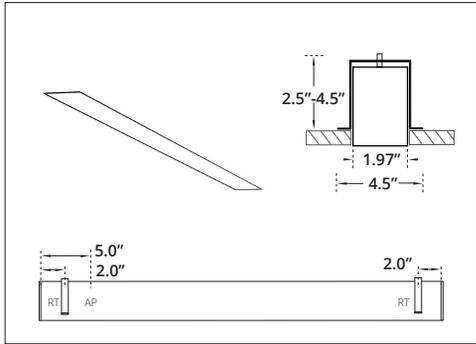


RECESSED TRIMLESS
AP - Access Power Plate
RT - Recessed Trimless Bracket
Cutout Dimensions = Total Length x Width of Extrusion.

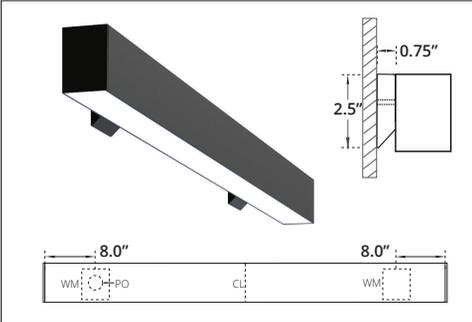

WALL MOUNT
PO - Power Opening
WM - Wall Mount Bracket
1-3 ft, single Wall Mount Bracket with Power Opening in the centre.

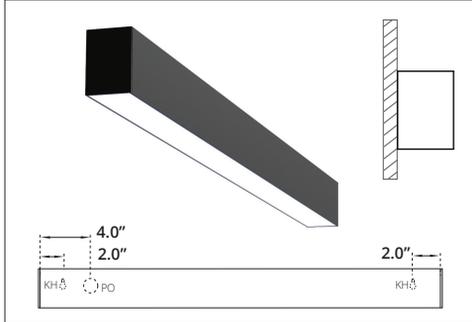

WALL FLUSH
KH - Key Hole
PO - Power Opening

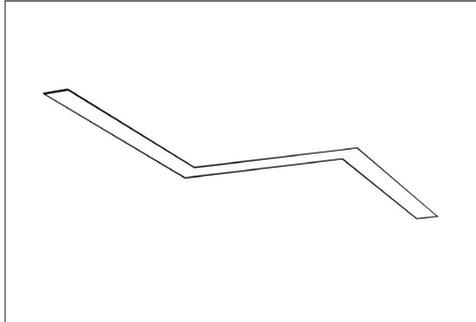

VARIABLE ANGLE
60°, 90°, 120°, 135° or Custom.