



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency semi-specular integral reflector comes with 40° lighting distribution.
- ✓ Available with an optional flat frame plate for NC installations.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Choice of integrated reflector for standard downlight or asymmetric wall wash illumination.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED RD+ — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

☐ 4 in

SOURCE

☐ 10 W

☐ 20 W

RADIANCE

☐ DD - Direct

VOLTAGE

☐ UNV - 120/277V

☐ 347V¹

1. Verify availability.

DRIVER

☐ ST - On/Off

☐ DL - 0-10V Dim (1%)

☐

Specify required dimming method.

MOUNTING

☐ RT - Retrofit

☐ NC - New Const. Plate

BEAM

☐ BF - Flood 40°

☐ BA - Asymmetric

TRIM

☐ BK - Black¹
☐ WH - White²

1. RAL 9005

2. RAL 9003

CCT

☐ 30K - 3000 Kelvin/90CRI

☐ 35K - 3500 Kelvin/90CRI

☐ 40K - 4000 Kelvin/90CRI

☐


Specify required CCT.

DIMENSIONS:

Height	Width	Cut Out
5.250 in	4.375 in	3.750 in

LUMEN OUTPUT:

Watts	30K	35K	40K
10 W	975 lm	1000 lm	1025 lm
20 W	1950 lm	2000 lm	2050 lm

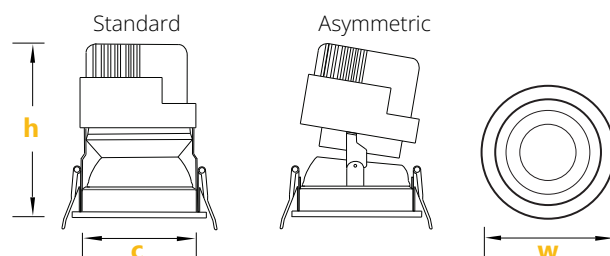

Project:

Type: