



FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: COB LED.
- ✓ Mini Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with Medium 24°/19UGR or Wide 40°/19UGR internal optics.
- ✓ Suitable for recessed installation into drywall.
- ✓ Comes with a standard black or white finish.
- ✓ Spotlight available with 355° rotation & 90° pivot.
- ✓ COB LED is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED MINI+

TYPE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — BEAM — REFLECTOR — FINISH — CCT

Enter the Product Code into the boxes above.

TYPE

- 2
- 4
- 5
- 3T

SOURCE

- 5 W
- 8 W
- 12 W
- 10 W

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DA - DALI
-

Specify dimming protocol.

MOUNTING

- RS - Recessed¹
1. Drywall Ceiling.

BEAM

- BM - Medium 24°
- BW - Wide 40°

REFLECTOR

- RB - Black
- RW - White

FINISH

- BK - Black¹
 - WH - White²
1. RAL 9005
2. RAL 9003

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
-


Specify required CCT.

DIMENSIONS:

Type	Width	length	Cut Out	Height
2	1.77 in	2.75 in	1.45x2.44 in	2.36 in
4	2.95 in	2.95 in	2.55x2.55 in	
5	1.77 in	5.98 in	1.45x5.66 in	
3T	1.77 in	5.98 in	1.45x5.66 in	

LUMEN OUTPUT:

Type	Watts	30K	35K	40K
2	5 W	300 lm	310 lm	320lm
4	8 W	650 lm	675 lm	700lm
5	12 W	800 lm	825 lm	850 lm
3T	10 W	600 lm	625 lm	650 lm

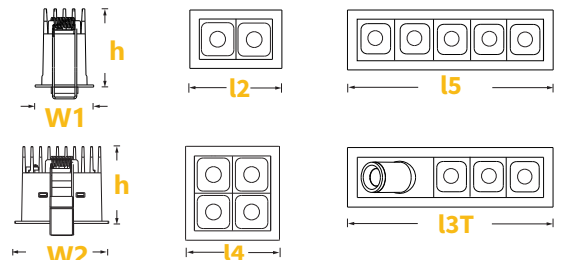

Project:

Type: