

## FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high efficiency opal lens.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed applications in drywall or T-Bar ceilings.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED VECTOR1+**  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### SIZE

\_\_\_\_ ft  
1-8 ft  
Continuous Run  
(1 ft Increments)

### SOURCE

5 W/ft  
 7 W/ft  
 10 W/ft

### RADIANCE

DD - Direct

### VOLTAGE

UNV - 120/277V  
 347V<sup>1</sup>

1. Verify availability.

### DRIVER

ST - On/Off  
 DL - 0-10V Dim (1%)  
 DLO - 0-10V Dim (to Off)  
 DL2 - 0-10V Dim (TW)  
 DLA - 0-10V Dim (Aux)  
 DA4 - DALI D4i  
 CV - Constant Voltage (RGBW)  
  

Specify dimming protocol.

### MOUNTING

RS - Recessed  
 RB - Recessed T-Bar

### LENS

OP - Opal

### FINISH

BK - Black<sup>1</sup>  
 WH - White<sup>2</sup>  
 CF/RAL   
1. RAL 9005  
2. RAL 9016  
Specify required RAL number.

### CCT

30K - 3000 Kelvin/90CRI  
 35K - 3500 Kelvin/90CRI  
 40K - 4000 Kelvin/90CRI  
 RGBW<sup>1</sup>  
 TW - Tunable White (27K-65K)<sup>2</sup>  
  

1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

### OPTIONS

No Options<sup>1</sup>  
 EM - Emergency Battery Pack<sup>2</sup>  
 EC - Emergency Circuit  
 DR - Damp Rated  
 CB - Casambi Bluetooth(TW, RGBW)<sup>3</sup>  
 DMX - DMX (RGBW)  
 JD - JDRF Autonomy Sensor (DA4)<sup>3</sup>  
 DOS - Daylight & Occupancy Sensor (DLA)<sup>3</sup>  
 AWN - Athena Wireless Node (DLA)<sup>3</sup>

1. Leave empty.  
2. Battery Pack per 4 ft section.  
3. Available in sizes 4 ft and up.

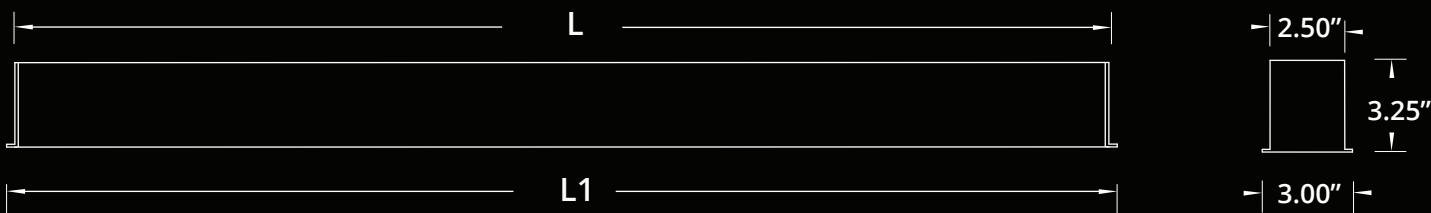
## LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm


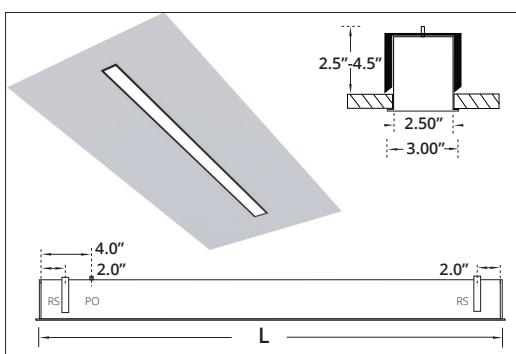

 Declare.<sup>®</sup>

Project:

Type:

**SIZE:**

**CONTINUOUS RUN:**


1. **L**-Total length for Drywall ceiling.  
 2. **L1**- Total length for T-Bar ceiling.

**RADIANCE:**

**MOUNTING:**

**RECESSED**

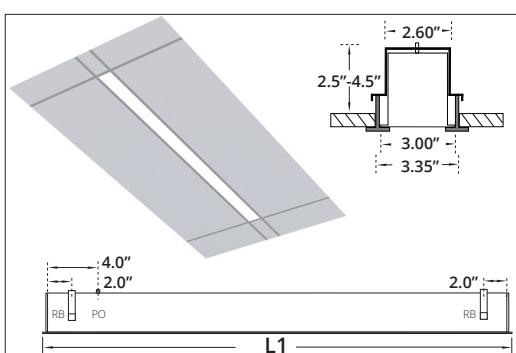
RS - Recessed Bracket

PO - Power Opening

Cutout Dimensions = Total Length x Width of Extrusion.

Size	<b>L</b> (Drywall Ceiling)
1 ft	11.34 in
2 ft	22.34 in
3 ft	33.34 in
4 ft	48.22 in
5 ft	59.22 in
6 ft	71.97 in
7 ft	82.97 in
8 ft	95.72 in

1. **L** is Total length with endcaps for Drywall Ceiling.  
 2. Cutout Dimensions = Total Length x Width of Extrusion.


**RECESSED T-BAR**

RB - Recessed T-BAR Bracket

PO - Power Opening

Size	<b>L1</b> (T-Bar Ceiling)
1 ft	11.75 in
2 ft	23.75 in
3 ft	35.75 in
4 ft	47.75 in
5 ft	59.75 in
6 ft	71.75 in
7 ft	83.75 in
8 ft	95.75 in

**L1** is Total length with endcaps for T-Bar Ceiling.