

FEATURES:

- ✓ Architectural curved system with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens or by an optional prismatic optic.
- ✓ Sleek body of the luminaire is made from an aluminum profile curved to desire shape.
- ✓ Suitable for suspended or surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED CURVES+ - - - - - - - - - - -

Enter the Product Code into the boxes above.

SHAPE

- ☐ CR - Curve
☐ RG - Ring
☐ OV - Oval
☐ SQ - Square
☐ RC - Rectangle
☐ CS - Custom Shape

Specify Custom Shape.

SIZE

- ☐ _____ Linear ft
 Provide drawing (pdf or dwg).

SOURCE

- ☐ 5W/ft
☐ 7W/ft
☐ 10W/ft

RADIANCE

- ☐ DD - Direct
☐ UD - Uneven¹
 1. Suspended Configuration only.

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐

Specify dimming protocol.

MOUNTING

- ☐ S4-Suspension 4 ft
☐ S6-Suspension 6 ft
☐ S ft
☐ SF - Surface Mount

Specify required Length.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
 1. RAL 9005
 2. RAL 9016
 Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐

1. Available with DMX or CB.
 2. Available with DL2, DA4 or CB.
 Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ DC - Dual Circuit²
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth(TW, RGBW)
☐ DMX - DMX (RGBW)
☐ JD - JDRF Autonomy Sensor (DA4)
☐ DOS - Daylight & Occupancy Sensor (DLA)
☐ AWN - Athena Wireless Node (DLA)

1. Leave empty.
 2. Control Downlight/Uplight separately.

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Project:

Type:



SIZE:

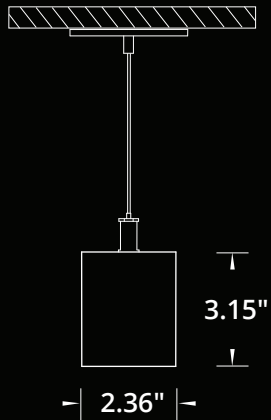


MINIMUM RADIUS:




RADIANCE:



SHAPES:

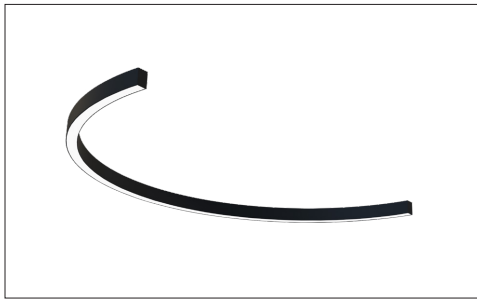


CURVE

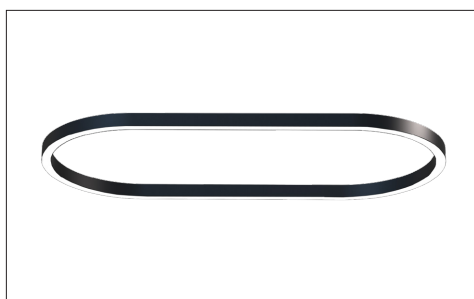

OVAL




SQUARE

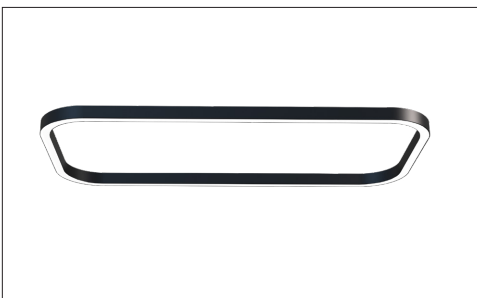

RECTANGLE



CUSTOM SHAPE

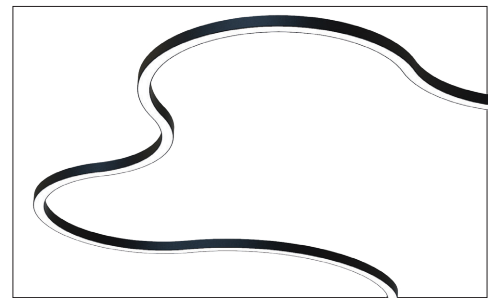

CUSTOM SHAPE