


FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with an opal lens insert provides excellent lighting distribution.
- ✓ Available with Spot 25°, Flood 45° and Wide Flood 60° beam angles.
- ✓ Aluminum body of the luminaire comes with a built-in-driver.
- ✓ Suitable for surface mounted and suspended installations.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight
SPECIFICATION:
ED PIPE+ - - - - - - - - -

Enter the Product Code into the boxes above.

SIZE

- 11 in
- 22 in
- 33 in

MOUNTING

- S6B - 6 ft Cord BK¹
- S6W - 6 ft Cord WH¹
- S ft²
- SF - Surface Mount

 1. Canopy match the Cord color.
 2. Specify Suspension length.

SOURCE

- 10 W
- 15 W
- 20 W

BEAM

- BS - Spot 25°
- BF - Flood 45°
- BW - Wide 60°

RADIANCE

- DD - Direct

FINISH

- BK - Black¹
- WH - White²
- 1. RAL 9005
- 2. RAL 9003

VOLTAGE

- UNV - 120/277V

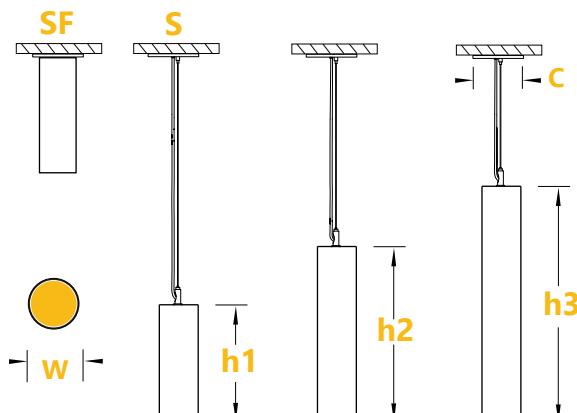
CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
-

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DA4 - DALI D4i
-

Specify dimming protocol.


DIMENSIONS:

Width		Canopy
4.0"	5.0"	
Height		
h1	h2	h3
11.0"	22.0"	33.0"

LUMEN OUTPUT:

Watts	30K	35K	40K
10 W	930 lm	950 lm	990 lm
15 W	1395 lm	1425 lm	1475 lm
20 W	1860 lm	1900 lm	1940 lm

Project:

Type: