

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency low glare integral reflector comes in the following beam angles: Narrow 15°, Medium Flood 35° and Flood 55°.
- ✓ Adjustable trim assembly can be tilted up to 30° for wall wash applications.
- ✓ Available with an optional flat frame plate for NC installations.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED SD+ — — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

- 2x - Double

SOURCE

- 15 W
- 20 W

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
 - 347V¹
1. Verify availability.

DRIVER

- ST - On/Off
 - DL - 0-10V Dim (1%)
 -
- Specify required dimming method.

MOUNTING

- RT - Retrofit
- NC - New Const. Plate

BEAM

- BN - Narrow 15°
- BM - Medium 35°
- BF - Flood 55°

REFLECTOR

- MW - Matte White
- MB - Matte Black
- MS - Matte Silver

TRIM


- BK - Black¹
 - WH - White²
1. RAL 9005
2. RAL 9003

CCT

- 30K - 3000 Kelvin/90CRI
 - 35K - 3500 Kelvin/90CRI
 - 40K - 4000 Kelvin/90CRI
 -
- Specify required CCT.

DIMENSIONS:

Size	Height	Width
Double	4.88 in	4.13 in
Length	Cut Out	
7.69 in	7.48 in x 3.82 in	

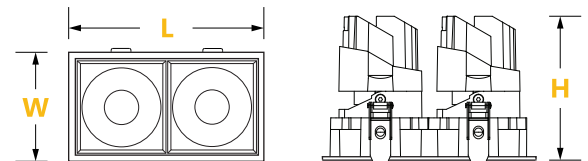

LUMEN OUTPUT:


Watts	30K	35K	40K
15 W	1425 lm	1455 lm	1485 lm
20 W	1900 lm	1940 lm	1980 lm



Project:

Type:

DRIVER BOX:

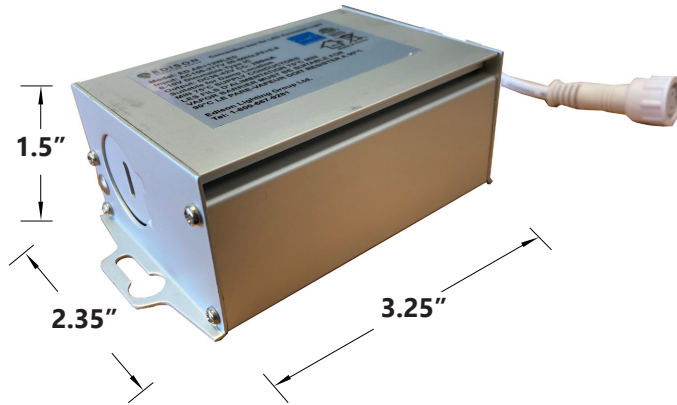

NC PLATE:

