


FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Built-in frosted lens controls the light and reduces the glare.
- ✓ Available with a standard or asymmetric semi-specular reflector.
- ✓ Round trim comes in a black and white finish.
- ✓ Suitable for recessed non-insulated ceilings or damp locations.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight
SPECIFICATION:


Enter the Product Code into the boxes above.

SIZE

-
- 4 in
-
-
- 6 in

SOURCE

-
- 10 W
-
-
- 20 W
-
-
- 30 W
- ¹

1. Available for 6 in trim only.

RADIANCE

-
- DD - Direct

VOLTAGE

-
- UNV - 120/277V
-
-
- 347V
- ¹
-
1. Verify availability.

DRIVER

-
- ST - On/Off
-
-
- DL - 0-10V Dim (1%)
-
-
-
-
- Specify required dimming method.

MOUNTING

-
- RT - Retrofit
-
-
- NC - New Const. Plate

BEAM

-
- BW - Wide 80°
-
-
- BA - Asymmetric
- ¹
-
1. Available for 4 in trim only.

TRIM


-
- BK - Black
- ¹
-
-
- WH - White
- ²
-
1. RAL 9005
-
2. RAL 9003

CCT

-
- 30K - 3000 Kelvin/90CRI
-
-
- 35K - 3500 Kelvin/90CRI
-
-
- 40K - 4000 Kelvin/90CRI
-
-
-
-
- Specify required CCT.

DIMENSIONS:

Size	4 Inch	6 Inch
Width	6.250 in	7.875 in
Height	4.875 in	5.875 in
Cutout	5.000 in	6.500 in

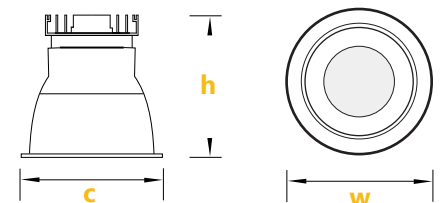
LUMEN OUTPUT:


Watts	30K	35K	40K
10 W	1050 lm	1100 lm	1125 lm
20 W	1915 lm	1950 lm	1985 lm
30 W	2950 lm	3010 lm	3070 lm



Project:

Type:

DRIVER BOX:

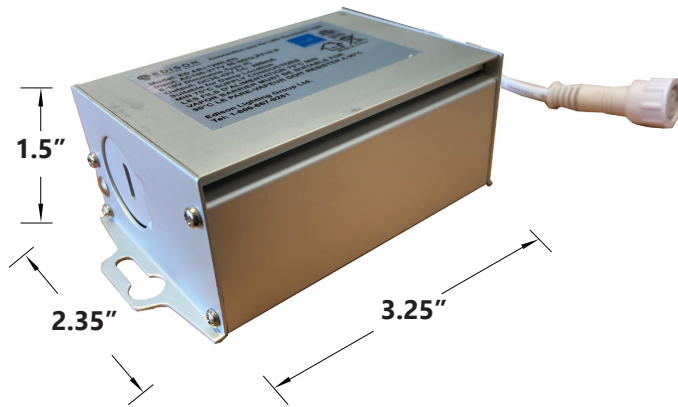

NC PLATE:

