

### FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

### SPECIFICATION:

**ED CROSS+**  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

#### SIZE

Ft\*

\*1-8 Ft Arm length.

#### SOURCE

- ☐ 5W/Ft  
☐ 7W/Ft  
☐ 10W/Ft

#### RADIANCE

- ☐ DD - Direct (100%Down)  
 \*Light Distribution.

#### VOLTAGE

- ☐ UNV - 120/277V  
☐ 347V\*  
 \*Not available for all configurations.

#### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DL2 - 0-10V Dim (TW)  
☐ DA4 - DALI D4i  
☐ DMX - DMX RGBW  
☐  \*  
 \*Specify dimming protocol.

#### MOUNTING

- ☐ S6W - 6Ft Cord WH\*  
☐ S6B - 6Ft Cord BK\*  
☐ S  Ft\*\*  
☐ WF - Wall Flush  
☐ SF - Surface Mount  
☐ RT - Recessed Trimless  
 \*Canopy will match the Cord color.  
 \*\*Specify Suspension length and color.

#### LENS

- ☐ OP - Opal  
☐ PR - Prismatic

#### FINISH

- ☐ BK - Black\*  
☐ WH - White\*\*  
☐ CF/RAL  \*\*\*  
 \*RAL 9005  
 \*\*RAL 9016  
 \*\*\*Specify required RAL number.

#### CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐ RGBW  
☐ TW - Tunable White\*  
 (2700K-6500K)  
☐  \*\*  
 \*Available with 0-10V, Dali or Bluetooth controls.  
 \*\*Specify required CCT.

#### OPTIONS

- ☐ No Options\*  
☐ DR - Damp Rated  
☐ CB - Casambi/Bluetooth  
☐  \*\*  
 \*Leave empty.  
 \*\*Specify required option.

### LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm




Declare.

Project:

Type:

### SIZE:

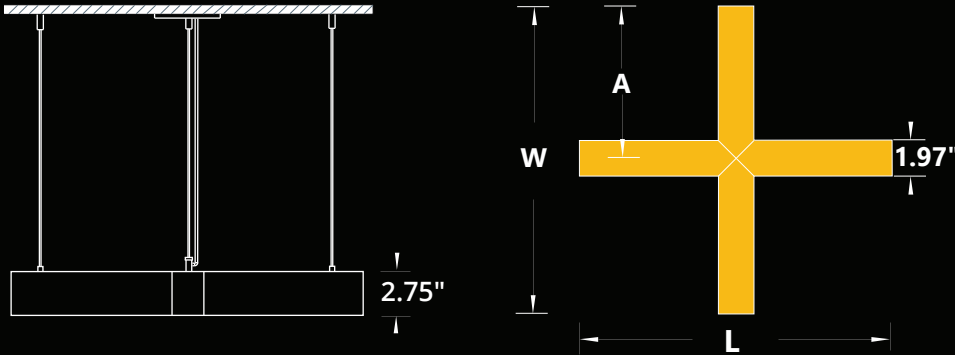

Size	A	L x W
1 Ft	11.70	23.40 x 23.40
2 Ft	24.45	48.90 x 48.90
3 Ft	35.45	70.90 x 70.90
4 Ft	48.20	96.40 x 96.40
5 Ft	59.20	118.40 x 118.40
6 Ft	71.95	143.90 x 143.90
7 Ft	82.95	165.90 x 165.90
8 Ft	95.70	191.40 x 191.40


\*A - Arm Length

\*\*L - Total Length


\*\*\*W - Total Width

\*\*\*\*All dimensions are in Inches.

### RADIANCE:




### MOUNTING:

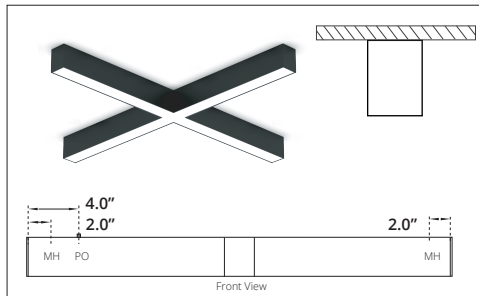


#### SURFACE MOUNT

MH - Mounting Hole  
PO - Power Opening

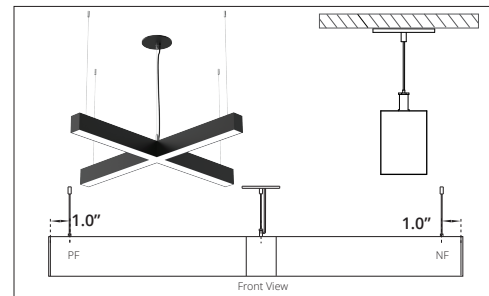


#### SUSPENDED

PF - Power Feed  
NF - Non Power Feed

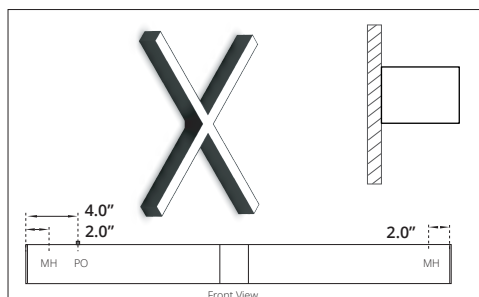

#### WALL FLUSH

MH - Mounting Hole  
PO - Power Opening

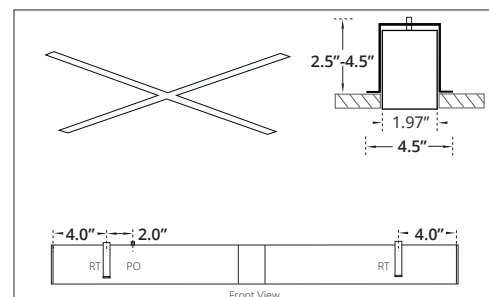

#### RECESSED TRIMLESS

RT - Recessed Trimless Bracket  
PO - Power Opening  
\*Cutout Dimensions = Total Length x Width of Extrusion.