



FEATURES:

- ✓ Architectural luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted lens.
- ✓ Sleek body of the luminaire is built from aluminum.
- ✓ Suitable for surface-mounted and suspended installations.
- ✓ Comes with a standard black or white finish.
- ✓ Also available in custom color option.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED DISC+

SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT

Enter the Product Code into the boxes above.

SOURCE

- ☐ 30 W
- ☐ 40 W

RADIANCE

- ☐ DD - Direct
- ☐ UD - Uneven¹

1. 70% Down/30% Up

VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V¹

1. Verify availability.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DA4 - DALI D4i
- ☐

Specify dimming protocol.

MOUNTING

- ☐ C6B - 6 ft Canopy BK¹
- ☐ C6W - 6 ft Canopy WH¹
- ☐ C ft²
- ☐ S6B - 6 ft Cord BK¹
- ☐ S6W - 6 ft Cord WH¹
- ☐ S ft²
- ☐ SF - Surface Mount

1. Canopy match the Cord color.
2. Specify Suspension length.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
- ☐ WH - White²
- ☐ CF/RAL

1. RAL 9005
2. RAL 9003
Specify required RAL number

CCT



- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI

DIMENSIONS:

Diameter	17.13 in
Height	3.58 in
Height 1	2.20 in

LUMEN OUTPUT:

Watts	30K	35K	40K
30 W	2800 lm	2850 lm	2900 lm
40 W	3725 lm	3800 lm	3875 lm

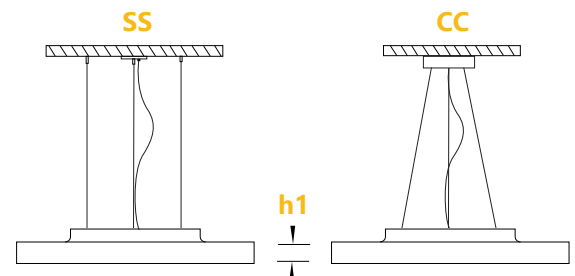

Project:

Type: