



## FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Built-in frosted lens controls the light and reduces the glare.
- ✓ Available with a standard or asymmetric semi-specular reflector.
- ✓ Round trim comes in a black and white finish.
- ✓ Suitable for recessed non-insulated ceilings or damp locations.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**

## SPECIFICATION:



Enter the Product Code into the boxes above.

### SIZE

- 4 in
- 6 in

### SOURCE

- 10 W
- 20 W
- 30 W<sup>1</sup>

1. Available for 6 in trim only.

### RADIANCE

- DD - Direct

### VOLTAGE

- UNV - 120/277V
- 347V<sup>1</sup>

1. Verify availability.

### DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- 

Specify required dimming method.

### MOUNTING

- RT - Retrofit
- NC - New Const. Plate

### BEAM

- BW - Wide 80°
- BA - Asymmetric<sup>1</sup>

1. Available for 4 in trim only.

### TRIM

- BK - Black<sup>1</sup>
- WH - White<sup>2</sup>

1. RAL 9005

2. RAL 9003

### CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- 


Specify required CCT.

## DIMENSIONS:

Size	4 Inch	6 Inch
Width	6.250 in	7.875 in
Height	4.875 in	5.875 in
Cutout	5.000 in	6.500 in

## LUMEN OUTPUT:

Watts	30K	35K	40K
10 W	1050 lm	1100 lm	1125 lm
20 W	1915 lm	1950 lm	1985 lm
30 W	2950 lm	3010 lm	3070 lm

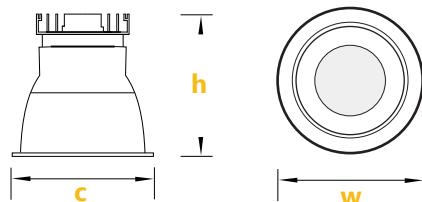

Project:

Type:

