


FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class 1 fire rated with a 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with an opal lens insert provides excellent lighting distribution.
- ✓ Square internal reflector is available in a black and white finish.
- ✓ Aluminum body of the luminaire comes with a built-in-driver.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight
SPECIFICATION:
Sonic CUBIC+ - - - - - - - - - -

Enter the Product Code into the boxes above

TYPE
 BS - Box

HEIGHT
 12 in
 16 in
 24 in

SOURCE
 15 W
 20 W
 25 W

RADIANCE
 DD - Direct

VOLTAGE
 UNV - 120/277V

DRIVER
 ST - On/Off
 DL - 0-10V Dim (1%)
 DA4 - DALI D4i

MOUNTING
 S6B - 6 ft Cord BK¹
 S6W - 6 ft Cord WH¹
 S ft²

 1. Canopy match the Cord Color
 2. Specify Suspension Length/color.

REFLECTOR
 BR - Black
 WR - White

ED CUBIC+ FINISH
 BK - Black¹
 WH - White²
 1. RAL 9005
 2. RAL 9003

CCT
 30K - 3000 Kelvin/90CRI
 35K - 3500 Kelvin/90CRI
 40K - 4000 Kelvin/90CRI

Specify required CCT.

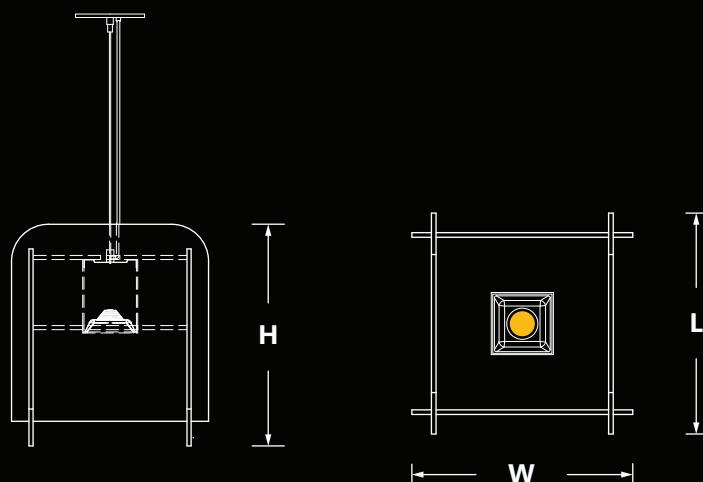
ACOUSTIC FINISH

Specify Acoustic finishes, For example (11/04).


LUMEN OUTPUT:

Watts	30K	35K	40K
15 W	1400 lm	1430 lm	1460 lm
20 W	1910 lm	1950 lm	1990 lm
25 W	2350 lm	2400 lm	2450 lm


Project:
Type:

SIZE:


H - Height	L - Length	W - Width
12.00 in = 11.75 in	12.00 in	12.00 in
16.00 in = 15.75 in	16.00 in	16.00 in
24.00 in = 23.75 in	24.00 in	24.00 in

FINISHES:


11/18



03/01



31/07



25/18



25/24



12/09



11/01



24/09