

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for surface mounted installations.
- ✓ LED Spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED CUBIX+ TYPE x SOURCE - RADIANCE - VOLTAGE - DRIVER - MOUNTING - LOUVER - FINISH - CCT

Enter the Product Code into the boxes above.

TYPE

- ☐ 1-Single
- ☐ 2-Double
- ☐ 3-Triple

SOURCE

- ☐ 5W LED
- ☐ 10W LED
- ☐ 15W LED

RADIANCE

- ☐ DD - Direct (100%Down)
- *Light Distribution.

VOLTAGE

- ☐ 120V
 - ☐ 277V
 - ☐ 347V*
- *Not available for all configurations.

DRIVER

- ☐ ST - Standard (Non-Dimming)
 - ☐ DL - 0-10V Dimming (1%)
 - ☐ DA - DALI
 - ☐ *
- *Please specify dimming method.

MOUNTING

- ☐ SF - Surface Mount

LOUVER

- ☐ WH - White
- ☐ BK - Black
- ☐ SL - Silver
- ☐ GL - Gold
- ☐ RG - Rose Gold

FINISH

- ☐ BK - Black
- ☐ WH - White

CCT


- ☐ 30K - 3000Kelvin/90CRI
 - ☐ 35K - 3500Kelvin/90CRI
 - ☐ 40K - 4000Kelvin/90CRI
- *Other options are available.

DIMENSIONS:

Unit	Length	Height	Width
Single	3.750"	4.500"	3.750"
Double	7.375"	4.500"	3.750"
Triple	10.937"	4.500"	3.750"

LUMEN OUTPUT:

Watts	30K	35K	40K
10W	930 lm	950 lm	970 lm
15W	1395 lm	1425 lm	1450 lm

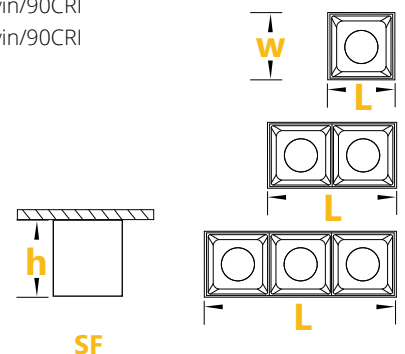

Project:

Type: