



## FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Built-in frosted lens controls the light and reduces the glare.
- ✓ Available with a standard or asymmetric semi-specular reflector.
- ✓ Round trim comes in a black and white finish.
- ✓ Suitable for recessed non-insulated ceilings or damp locations.
- ✓ LED Spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**

## SPECIFICATION:

**ED LR+**

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	HOUSING	BEAM	TRIM	CCT
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

### SIZE

- ☐ 4 in  
☐ 6 in

### SOURCE

- ☐ 10 W  
☐ 20 W  
☐ 30 W<sup>1</sup>

1. Available for 6 in trim only.

### RADIANCE

- ☐ DD - Direct

### VOLTAGE

- ☐ UNV - 120/277V  
☐ 347V<sup>1</sup>  
 1. Verify availability.

### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐   
 Specify required dimming method.

### HOUSING

- ☐ RT - Retrofit  
☐ NC - New Const. Plate

### BEAM

- ☐ BW - Wide 80°  
☐ BA - Asymmetric<sup>1</sup>  
 1. Available for 4 in trim only.

### TRIM

- ☐ BK - Black<sup>1</sup>  
☐ WH - White<sup>2</sup>  
 1. RAL 9005  
 2. RAL 9003

### CCT


- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐   
 Specify required CCT.

## DIMENSIONS:

Size	4 Inch	6 Inch
Width	6.250 in	7.875 in
Height	4.875 in	5.875 in
Cutout	5.000 in	6.500 in

## LUMEN OUTPUT:

Watts	30K	35K	40K
10 W	1050 lm	1100 lm	1125 lm
20 W	1915 lm	1950 lm	1985 lm
30 W	2950 lm	3010 lm	3070 lm

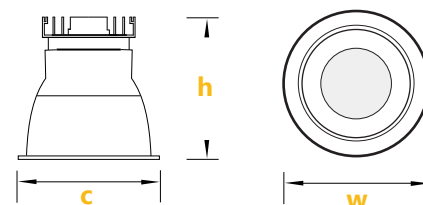

Project:

Type:

