


## **FEATURES:**

- Architectural luminaire with direct lighting distribution.
- Light source: 11" LED modular board.
- Dark Optic provides superior lighting distribution with precise low-glare illumination.
- 7 cell LEDiL reflector is available in several standard finishes.
- Offered with Flood 50°/16UGR and Wide 80°/19UGR internal optics.
- Low profile steel body housing contains a built-in driver.
- Has a proven record in office, commercial and retail installations.

Suitable for non-insulated recessed installations into T-Bar or drywall.

- LED's are rated for 60,000hrs. L80 with +90 CRI.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL Standards.

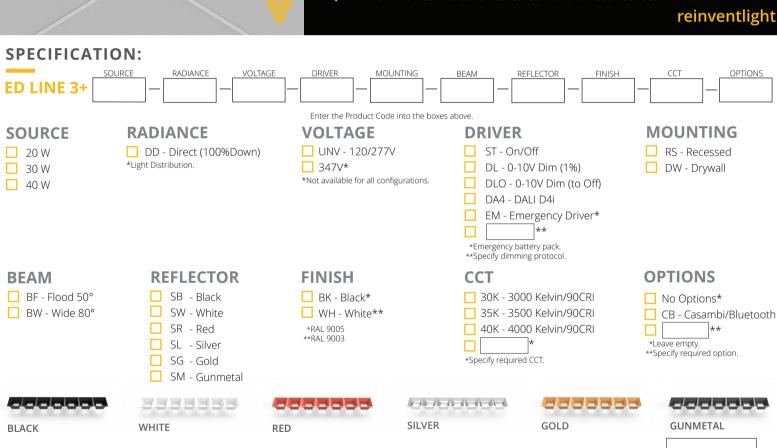

## **DIMENSIONS:**

Length	Width	Height
23.75"	23.75"	1.50"

## **LUMEN OUTPUT:**

Watts	30K	35K	40K
20 W	1320 lm	1350 lm	1380 lm
30 W	2635 lm	2700 lm	2765 lm
40 W	3950 lm	4050 lm	4150 lm









Declare.







905-830-0339 / 1-800-667-9281

info@edisonlighting.ca



www.edisonlighting.ca