

FEATURES:

- ✓ Architectural luminaire with direct/indirect lighting distribution.
- ✓ Light source: COB LED.
- ✓ Extremely durable round diffuser is made from frosted PMMA polycarbonate for even lighting distribution.
- ✓ Steel body with built-in-driver, available in black or white finish.
- ✓ Suitable for surface and wall mounted installations.
- ✓ LED spot is rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED COR+

SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

SOURCE

- ☐ 15 W
- ☐ 20 W
- ☐ 30 W

RADIANCE

- ☐ DI - Direct Indirect¹
- 1. 85% Down/15% Up

VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V¹
- 1. Verify availability.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DA4 - DALI D4i
- ☐
- Specify dimming protocol.

MOUNTING

- ☐ WM - Wall Mount
- ☐ CM - Ceiling Mount

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
- ☐ WH - White²
- 1. RAL 9005
- 2. RAL 9016

CCT


- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐
- Specify required CCT.

DIMENSIONS:

Height	Width
2.375 in	11.50 in

LUMEN OUTPUT:

Watts	30K	35K	40K
15 W	1360 lm	1400 lm	1440 lm
20 W	1850 lm	1900 lm	1950 lm
30 W	2800 lm	2900 lm	3000 lm

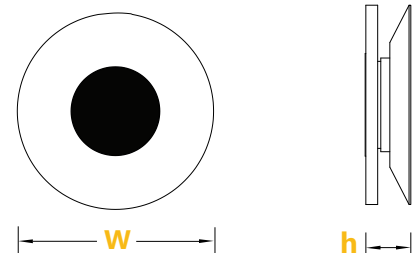

Project:

Type: