

FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Also available with custom colour options.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

Sonic DRUM+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ FV - Flush Vcut
☐ FR - Flush Regular
☐ RA- Recessed Angle
☐

Specify custom type.

HEIGHT

- ☐ 12 in
☐ 16 in
☐ 24 in

SIZE

- ☐ 2 ft
☐ 3 ft
☐ 4 ft

SOURCE

- ☐ 25 W
☐ 50 W
☐ 75 W¹

1. Available for 4 ft size.

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹

1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ CV - Constant Voltage (RGBW)
☐

Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK¹
☐ S6W - 6ft Cord WH¹
☐ S ft²
☐ SF - Surface Mount

1. Canopy match the Cord color.
2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

ED DRUM+ FINISH

- ☐ BK - Black¹
☐ WH - White²
1. RAL 9005
2. RAL 9003

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐

1. Available with CV.
2. Available with DL2.
Specify required CCT.

ACOUSTIC FINISH



LUMEN OUTPUT:

Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm
75 W	7720 lm	7875 lm	8030 lm





Declare.

Project:

Type:

SIZE:

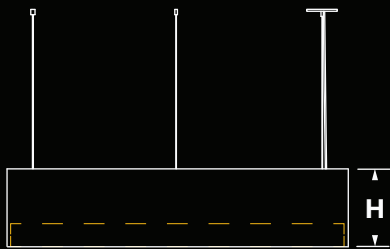

H - Height		D - Diameter	
12 in = 11.75 in	2 ft	24.875 in	
16 in = 15.75 in	3 ft	36.675 in	
24 in = 23.75 in	4 ft	48.485 in	

FR-FLUSH REGULAR



MOUNTING:



FV - FLUSH VCUT



FR - FLUSH REGULAR



SF - SURFACE MOUNT



RA - RECESSED ANGLE

FINISHES:



#11



#28



#18



#25