

### FEATURES:

- ✓ Architectural Y-shaped luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Flood 50°/10UGR or Wide Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

### SPECIFICATION:

#### ED TRIAD+

TYPE	SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	BEAM	REFLECTOR	FINISH	CCT	OPTION
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

#### TYPE

☐ DO - Dark Optic

#### SIZE

☐  ft  
2-8 ft Arm length.

#### SOURCE

☐ 3 W/ft  
☐ 5 W/ft  
☐ 8 W/ft

#### RADIANCE

☐ DD - Direct

#### VOLTAGE

☐ UNV - 120/277V  
☐ 347V<sup>1</sup>  
1. Verify availability.

#### DRIVER

☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DLA - 0-10V Dim (Aux)  
☐ DA4 - DALI D4i  
☐   
Specify dimming protocol.

#### MOUNTING

☐ S6B - 6ft Cord BK<sup>1</sup>  
☐ S6W - 6ft Cord WH<sup>1</sup>  
☐ S  Feet<sup>2</sup>  
☐ SF - Surface Mount  
☐ RT - Recessed Trimless  
1 Canopy match the Cord color.  
2 Specify Suspension length/color.

#### BEAM

☐ FB - Flood 50°  
☐ WF - Wide Flood 80°

#### REFLECTOR

☐ SB - Black  
☐ SW - White  
☐ SR - Red  
☐ SL - Silver  
☐ SG - Gold  
☐ SM - Gunmetal

#### FINISH

☐ BK - Black<sup>1</sup>  
☐ WH - White<sup>2</sup>  
☐ CF/RAL   
1. RAL 9005  
2. RAL 9016  
Specify required RAL number.

#### CCT

☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐   
Specify required CCT.

#### OPTIONS

☐ No Options<sup>1</sup>  
☐ EC - Emergency Circuit  
☐ CB - Casambi Bluetooth  
☐ JD - JDRF Autonomy Sensor (DA4)  
☐ DOS - Daylight & Occupancy Sensor (DLA)  
☐ AWN - Athena Wireless Node (DLA)  
1 Leave empty.

### LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
3 W	395 lm	405 lm	415 lm
5 W	660 lm	675 lm	690 lm
8 W	1050 lm	1080 lm	1130 lm





Declare.

Project:

Type:


SIZE:

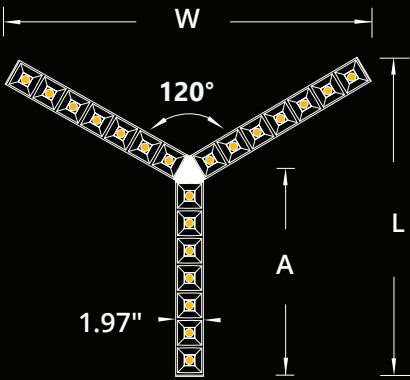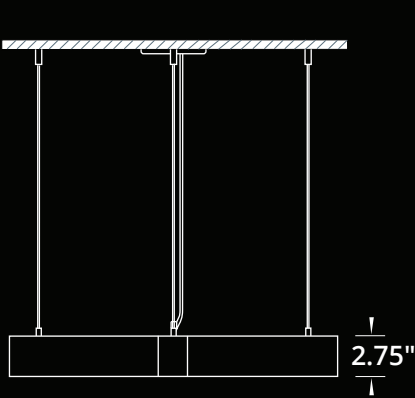


Size	A	L x W
2 ft	22.90 in	35.20 x 40.65 in
3 ft	33.90 in	51.70 x 59.70 in
4 ft	44.90 in	68.20 x 78.75 in
5 ft	55.90 in	84.70 x 97.80 in
6 ft	66.90 in	101.20 x 116.85 in
7 ft	77.90 in	117.70 x 135.90 in
8 ft	88.90 in	134.20 x 154.96 in

A - Arm Length includes the filler plate.  
L - Total Length  
W - Total Width

BEAM ANGLE:



Flood Beam



Wide Flood Beam

REFLECTORS:

SQUARE



WHITE



GOLD



SILVER



RED




BLACK




GUNMETAL

MOUNTING:

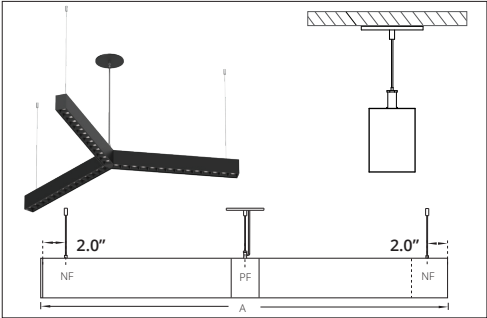


SUSPENDED

PF - Power Feed  
NF - Non Power Feed

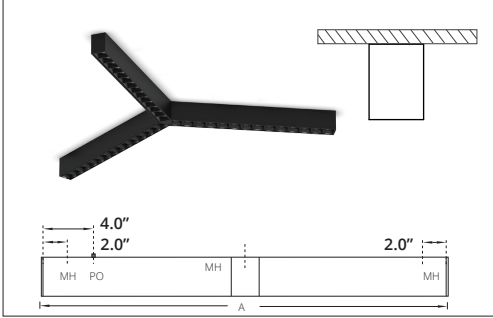

SURFACE MOUNT

PO - Power Opening  
MH - Mounting Hole

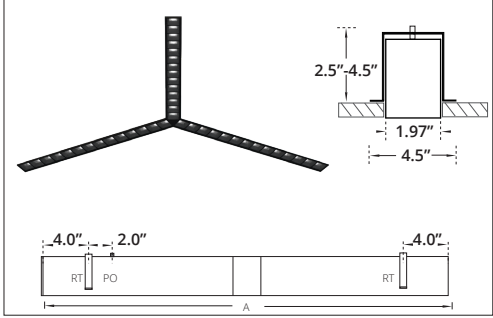

RECESSED TRIMLESS

PO - Power Opening  
RT - Recessed Trimless Bracket  
Cutout Dimensions = Arm Length x Width of Extrusion.