


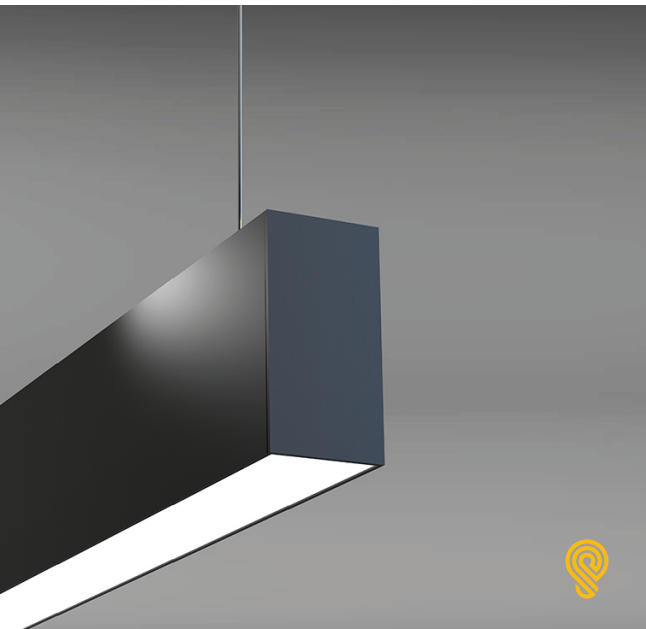

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high efficiency opal lens.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for suspended, wall mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR5+ - - - - - - - - - -

Enter the Product Code into the boxes above.

SIZE

_____ Ft*
*1-8 Ft
Continuous Run
(0.5 Ft Increments)

SOURCE

- ☐ 5 W/Ft
- ☐ 7 W/Ft
- ☐ 10 W/Ft

RADIANCE

- ☐ ED - Even(50%Down/50%Up)
- ☐ UD - Uneven(70%Down/30%Up)
- ☐ DD - Direct (100%Down)
- ☐ ID - Indirect (100%Up)

*Light Distribution.

VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DL2 - 0-10V Dimming (2Channels)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐ EM - Emergency Driver*
- ☐ **

*Battery Pack min. 4 Ft section.
**Specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
- ☐ S6B - 6Ft Cord BK*
- ☐ S Feet**
- ☐ WM - Wall Mount
- ☐ WF - Wall Flush

*Canopy will match the Cord color.
**Specify Suspension length and color.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black*
- ☐ WH - White**
- ☐ CF/RAL ***

*RAL#9005
**RAL#9016
***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW
- ☐ TW - Tunable White*
(2700K-6500K)
- ☐ **

*Available with 0-10V, Dali or Bluetooth controls.
**Specify required CCT.

OPTIONS

- ☐ No Options*
- ☐ DR - Damp Rated
- ☐ DC - Dual Circuit**
- ☐ CB - Casambi/Bluetooth
- ☐ JD - JDRF Autonomy Sensor
- ☐ DOS - Daylight & Occupancy Sensor
- ☐ ***

*Leave empty.
**Control Downlight/Uplight separately.
***Specify required option.

LUMEN OUTPUT W/Ft:



Watts	30K	35K	40K
5W	535 lm	550 lm	565 lm
10W	1070 lm	1100 lm	1130 lm
15W	1610lm	1650 lm	1690 lm



Project:

Type:

SIZE:

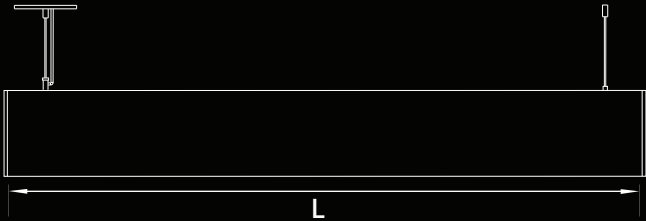


Size	L (Extrusion Length)
1 Ft	11.50 In
2 Ft	24.25 In
3 Ft	35.25 In
4 Ft	48.00 In
5 Ft	59.00 In
6 Ft	71.75 In
7 Ft	82.75 In
8 Ft	95.50 In

Total length with endcaps = L + 0.22"


CONTINUOUS RUN:



RADIANCE:




Direct Distribution




Uneven Distribution


MOUNTING:

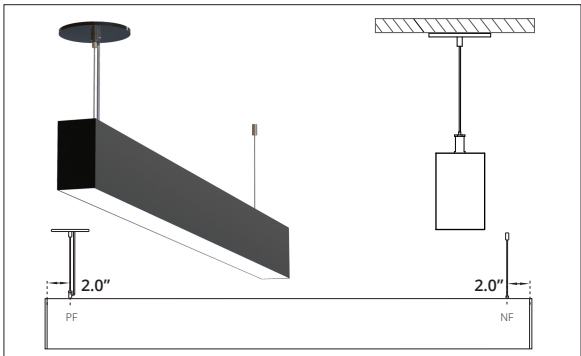


SUSPENDED
 PF - Power Feed
 NF - Non Power Feed

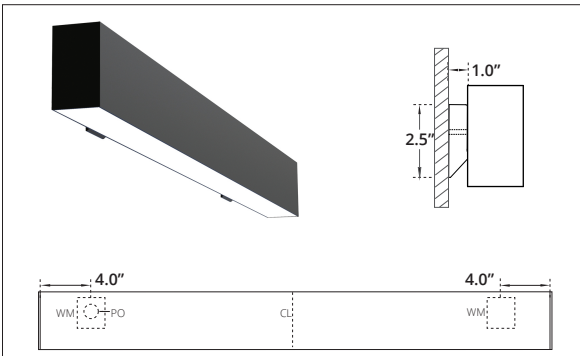

WALL MOUNT
 PO - Power Opening
 WM - Wall Mount Bracket
 *1-3 Ft, single Wall Mount Bracket with Power Opening in the centre.

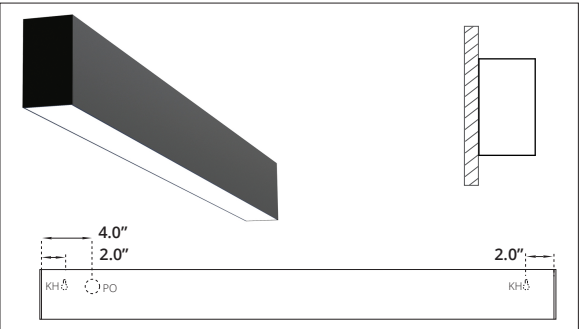

WALL FLUSH
 KH - Key Hole
 PO - Power Opening

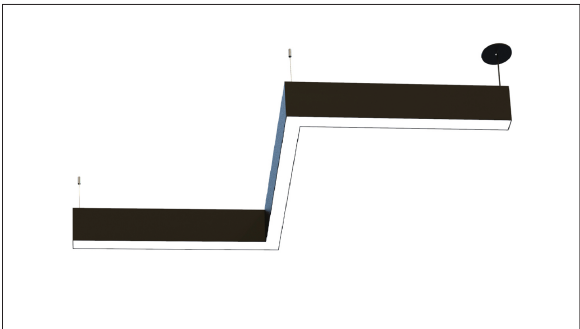

VARIABLE ANGLE
 60°, 90°, 120°, 135° or Custom.