

## FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**Sonic VECTOR+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above

<h3>TYPE</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> CS - Cloud</li> </ul>	<h3>HEIGHT</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> 16 in</li> <li><input type="checkbox"/> 18 in</li> <li><input type="checkbox"/> 24 in</li> </ul>	<h3>SIZE</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> 32 in</li> <li><input type="checkbox"/> 42 in</li> <li><input type="checkbox"/> 52 in</li> </ul>	<h3>SOURCE</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> 5 W/ft</li> <li><input type="checkbox"/> 7 W/ft</li> <li><input type="checkbox"/> 10 W/ft</li> </ul>	<h3>RADIANCE</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> DD - Direct</li> </ul>	<h3>VOLTAGE</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> UNV - 120/277V</li> <li><input type="checkbox"/> 347V<sup>1</sup></li> </ul> <p><small>1. Verify availability.</small></p>
<h3>DRIVER</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> ST - On/Off</li> <li><input type="checkbox"/> DL - 0-10V Dim (1%)</li> <li><input type="checkbox"/> DLO - 0-10V Dim (to Off)</li> <li><input type="checkbox"/> DL2 - 0-10V Dim (TW)</li> <li><input type="checkbox"/> CV - Constant Voltage (RGBW)</li> <li><input type="checkbox"/> <input type="text"/></li> </ul> <p><small>Specify dimming protocol.</small></p>	<h3>MOUNTING</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> S6B - 6 ft Cord BK<sup>1</sup></li> <li><input type="checkbox"/> S6W - 6 ft Cord WH<sup>1</sup></li> <li><input type="checkbox"/> S <input type="text"/> ft<sup>2</sup></li> </ul> <p><small>1. Canopy match the Cord Color 2. Specify Suspension Length/color.</small></p>	<h3>LENS</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> OP - Opal</li> </ul>	<h3>ED VECTOR+ FINISH</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> BK - Black<sup>1</sup></li> <li><input type="checkbox"/> WH - White<sup>2</sup></li> </ul> <p><small>1. RAL 9005 2. RAL 9016</small></p>	<h3>CCT</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> 30K - 3000 Kelvin/90CRI</li> <li><input type="checkbox"/> 35K - 3500 Kelvin/90CRI</li> <li><input type="checkbox"/> 40K - 4000 Kelvin/90CRI</li> <li><input type="checkbox"/> RGBW<sup>1</sup></li> <li><input type="checkbox"/> TW - Tunable White (27K-65K)<sup>2</sup></li> <li><input type="checkbox"/> <input type="text"/></li> </ul> <p><small>1. Available with CV. 2. Available with DL2. Specify required CCT.</small></p>	

## ACOUSTIC FINISH

Specify additional color for Two-Tone, for example 04/11.



## LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Project:


Type:

**SIZE:**

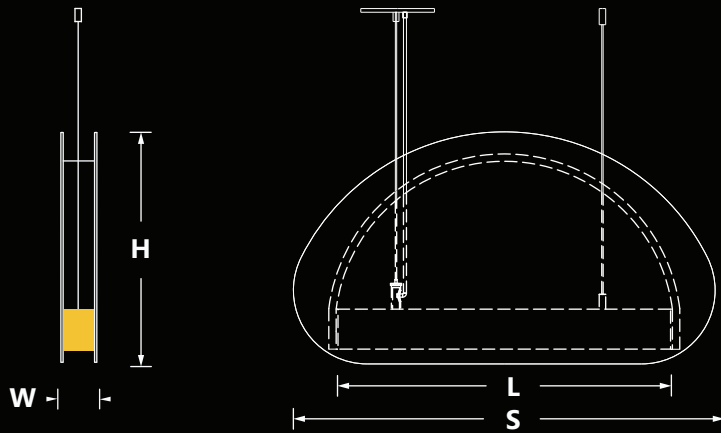


W - Width	H - Height
2.75 in	16 in = 15.75 in
	18 in = 17.75 in
	24 in = 23.75 in
S-Size	L - Luminaire Length
32 in	22.80 in
42 in	33.80 in
52 in	44.80 in

**RADIANCE:**




**FINISHES:**


**Regular**

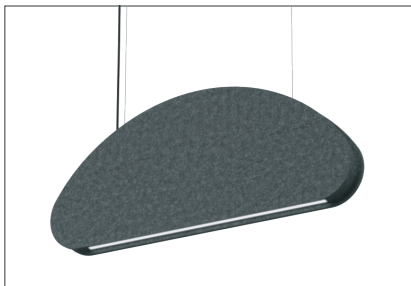

04

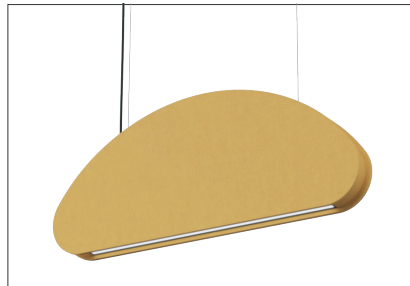


11

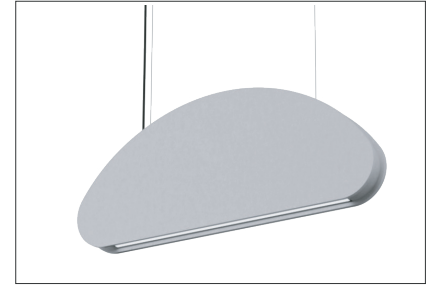


28


**Two-Tone**

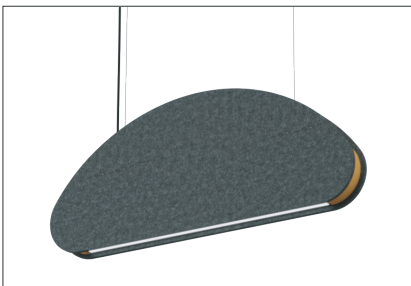

04/11

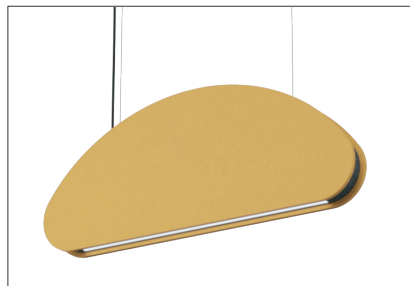

11/04

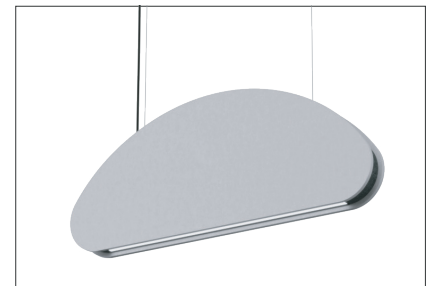

28/04