
**FEATURES:**

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed installation into Drywall or T-Bar.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards. **reinventlight**

**SPECIFICATION:**

**ED VECTOR+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

**TYPE**

- DO  
Dark Optic

**SIZE**

\_\_\_\_\_ ft  
1-8 ft  
Continuous Run  
(1 ft increments)

**SOURCE**

- 3 W/ft  
 5 W/ft  
 8 W/ft

**RADIANCE**

- DD - Direct

**VOLTAGE**

- UNV - 120/277V  
 347V<sup>1</sup>  
1. Verify availability.

**DRIVER**

- ST - On/Off  
 DL - 0-10V Dim (1%)  
 DLO - 0-10V Dim (to Off)  
 DLA - 0-10V Dim (Aux)  
 DA4 - DALI D4i  
   
Specify dimming protocol.

**MOUNTING**

- RS - Recessed<sup>1</sup>  
 RB - Recessed T-Bar  
1. Drywall Ceiling.

**BEAM**

- BF - Flood 50°  
 BW - Wide 80°  
 BA - Asymmetric

**REFLECTOR**

- SB - Black  
 SW - White  
 SR - Red  
 SL - Silver  
 SG - Gold  
 SM - Gunmetal

**FINISH**

- BK - Black<sup>1</sup>  
 WH - White<sup>2</sup>  
 CF/RAL   
1. RAL 9005  
2. RAL 9016  
Specify required RAL number.

**CCT**

- 30K - 3000 Kelvin/90CRI  
 35K - 3500 Kelvin/90CRI  
 40K - 4000 Kelvin/90CRI  
   
Specify required CCT.

**OPTIONS**

- No Options<sup>1</sup>  
 EM - Emergency Battery Pack<sup>2</sup>  
 EC - Emergency Circuit  
 CB - Casambi Bluetooth<sup>3</sup>  
 JD - JDRF Autonomy Sensor (DA4)<sup>3</sup>  
 DOS - Daylight & Occupancy Sensor (DLA)<sup>3</sup>  
 AWN - Athena Wireless Node (DLA)<sup>3</sup>

1. Leave empty.  
2. Battery Pack per 4 ft section.  
3. Available in sizes 4 ft and up.

**LUMEN OUTPUT W/ft:**

Watts	30K	35K	40K
3 W	395 lm	405 lm	415 lm
5 W	660 lm	675 lm	690 lm
8 W	1050 lm	1080 lm	1130 lm





Declare.

Project:

Type:

### SIZE:



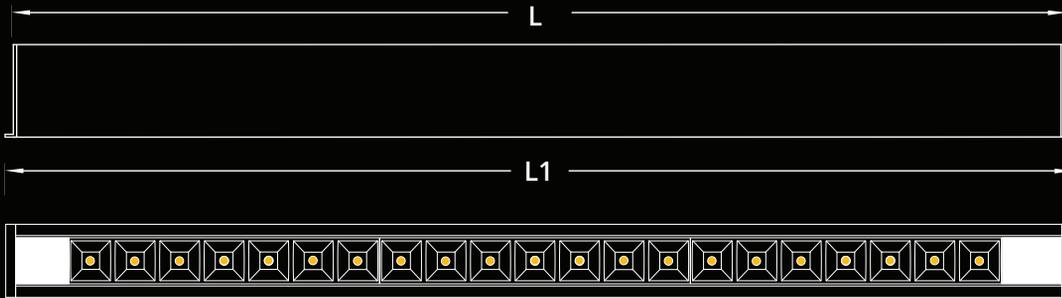


### CONTINUOUS RUN:




1. L-Total length for Drywall ceiling.
2. L1- Total length for T-Bar ceiling.
3. Extrusion length included filler plate.
4. 1-3 ft, no filler plate requires for Recessed Drywall.
5. 4-8 ft, filler plates at the end.
6. Continuous Run, filler plates in between & at the end.

### BEAM:



### MOUNTING:

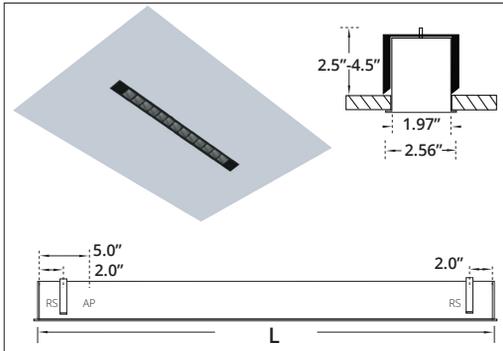


#### RECESSED

AP - Access Power Plate  
RS - Recessed Bracket

Size	L (Drywall Ceiling)
1 ft	11.34 in
2 ft	22.34 in
3 ft	33.34 in
4 ft	48.22 in
5 ft	59.22 in
6 ft	71.97 in
7 ft	82.97 in
8 ft	95.72 in

1. L is Total length with endcaps for Drywall Ceiling.  
2. Cutout Dimensions = Total Length x Width of Extrusion.

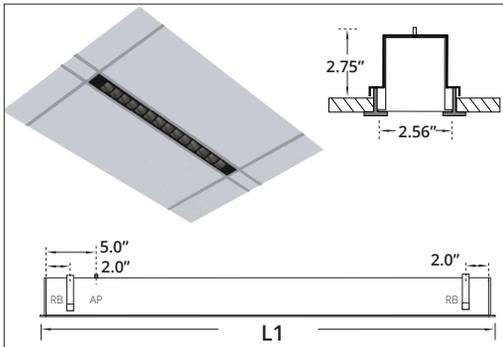

#### RECESSED T-BAR

AP - Access Power Plate  
RB - Recessed T-BAR Bracket

Size	L1 (T-Bar Ceiling)
1 ft	11.75 in
2 ft	23.75 in
3 ft	35.75 in
4 ft	47.75 in
5 ft	59.75 in
6 ft	71.75 in
7 ft	83.75 in
8 ft	95.75 in

L1 is Total length with endcaps for T-Bar Ceiling.

### REFLECTORS:

#### SQUARE



#### WHITE



#### SILVER



#### BLACK



#### GOLD



#### RED



#### GUNMETAL