

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ 7 cell LEDiL reflector is available in several standard finishes.
- ✓ Offered with Flood 50°/16UGR and Wide 80°/19UGR internal optics.
- ✓ Low profile steel body housing contains a built-in driver.
- ✓ Suitable for non-insulated recessed installations into T-Bar or drywall.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ LED's are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED LINE 8+ — — — — — — — — — —

Enter the Product Code into the boxes above.

SOURCE

- 40 W
- 60 W

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
-

Specify dimming protocol.

MOUNTING

- RS - Recessed

BEAM

- BF - Flood 50°
- BW - Wide 80°

REFLECTOR

- SB - Black
- SW - White

FINISH

- BK - Black¹
- WH - White²

1. RAL 9005
2. RAL 9003

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
-

Specify required CCT.

OPTIONS

- No - Options¹
- EM - Emergency Battery²
- JD - JDRF Autonomy Sensor (DA4)
- DOS - Daylight & Occupancy Sensor (DLA)
- AWN - Athena Wireless Node (DLA)
-

1. Leave empty.
2. Emergency battery pack.
Specify required option.



DIMENSIONS:


Length	Width	Height
47.75 in	23.75 in	1.50 in

LUMEN OUTPUT lm/W

Watts	30K	35K	40K
40 W	4900 lm	5000 lm	5100 lm
60 W	7350 lm	7500 lm	7650 lm



Declare.

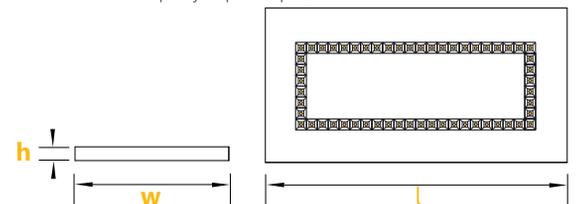

Project: _____

Type: _____