

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED TRIAD+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

SIZE

Feet*
*1-8 Ft Arm length.

SOURCE

- ☐ 5W/Ft
- ☐ 7W/Ft
- ☐ 10W/Ft

RADIANCE

- ☐ DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

- ☐ UNV - 120/277V
 - ☐ 347V*
- *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
 - ☐ DL - 0-10V Dimming (1%)
 - ☐ DLO - 0-10V Dimming (to Off)
 - ☐ DL2 - 0-10V Dimming (2 Channels)
 - ☐ DA4 - DALI D4i
 - ☐ DMX - DMX RGBW
 - ☐ *
- * Please specify dimming method.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
 - ☐ S6B - 6Ft Cord BK*
 - ☐ S Ft**
 - ☐ WF - Wall Flush
 - ☐ SF - Surface Mount
 - ☐ RT - Recessed Trimless
- *Canopy will match the Cord color.
**Specify Suspension length and color.

LENS

- ☐ OP - Opal
- ☐ PR - Prismatic

FINISH

- ☐ BK - Black*
 - ☐ WH - White**
 - ☐ CF/RAL ***
- *RAL 9005
**RAL 9016
***Specify required RAL number.

CCT

- ☐ 30K - 3000Kelvin//90CRI
 - ☐ 35K - 3500Kelvin/90CRI
 - ☐ 40K - 4000Kelvin/90CRI
 - ☐ TW - Tunable White*
(2700K-6500K)
 - ☐ **
- *Available with 0-10V, Dali or Bluetooth controls.
**Specify required CCT.

OPTIONS

- ☐ No Options*
 - ☐ DR - Damp Rated
 - ☐ CB - Casambi/Bluetooth
 - ☐ **
- *Leave empty.
**Specify required option.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm




Declare.

Project:

Type:

SIZE:

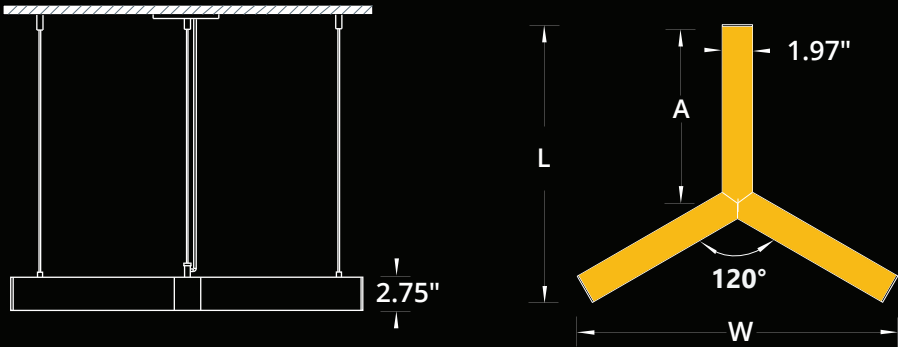

Size	A	L x W
1 Ft	11.70	18.40 x 21.25
2 Ft	24.45	37.53 x 43.33
3 Ft	35.45	54.03 x 62.39
4 Ft	48.20	73.15 x 84.47
5 Ft	59.20	89.65 x 103.52
6 Ft	71.95	108.78 x 125.61
7 Ft	82.95	125.28 x 144.66
8 Ft	95.70	144.40 x 166.74


*A - Arm Length

**L - Total Length


***W - Total Width

****All dimensions are in Inches.

RADIANCE:




MOUNTING:

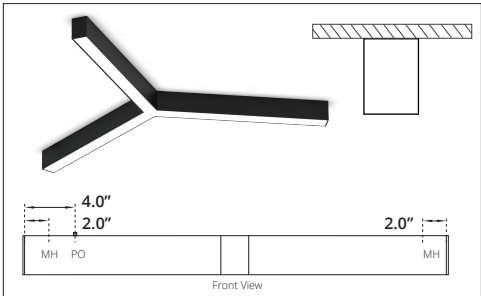

SURFACE MOUNT

MH - Mounting Hole


PO - Power Opening

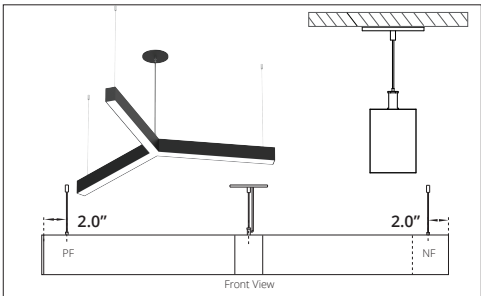

SUSPENDED

PF - Power Feed


NF - Non Power Feed

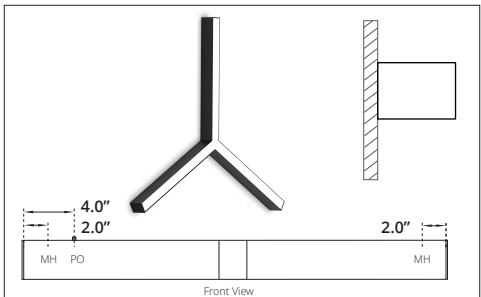

WALL FLUSH

MH - Mounting Hole

PO - Power Opening

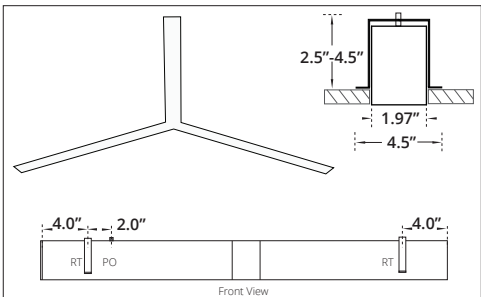

RECESSED TRIMLESS

RT - Recessed Trimless Bracket

PO - Power Opening

*Cutout Dimensions = Total Length x Width of Extrusion.